




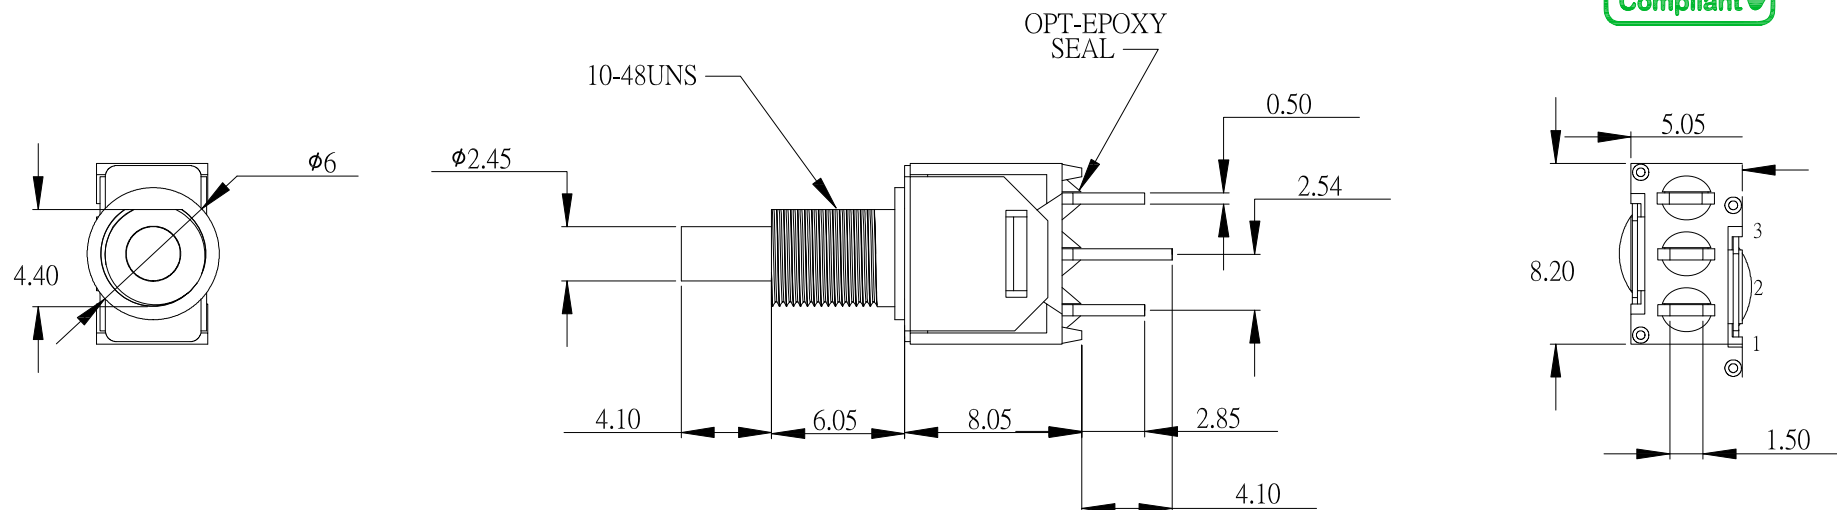

PRODUCT IMAGE

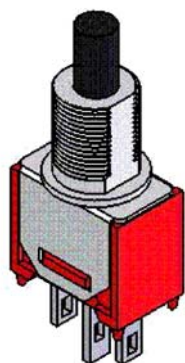

P.C.B MOUNTING

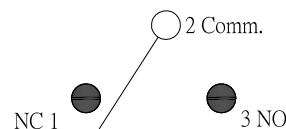

SPECIFICATIONS:

CONTACT RATING : 1 AMPS @ 120 V AC or 28 V DC.

0.4 AMPS @ 20 V AC or DC

ELECTRICAL LIFE : 30,000 make-and-break cycles at full load.

CONTACT RESISTANCE : 20 mΩ max. initial @ 2-4 VDC

100 mA , for both coin silver and gold plated contacts.

INSULATION RESISTANCE : 1,000 MΩ min

DIELETRIC STRENGTH : 1,000 V RAM @ sea level.

OPERATING TEMPERTURE : -30°C to 130°C

MTAERIALS:

CASE : Dially phthalate (DAP)(UL-94V-0).

PLUNGER : Thermoplastic polyester-black.

BUSHING : Brass , nickel plated.

HOUSING : Stainless steel.

TERMINAL/CONTACT : Brass , witch silver or gold plated.

or gold over silver

SWITCH SUPPORT : Brass , tin plated.

Model No.	TYPE	
AS-04	ON	MOM
Tem. Comm.	2-1	2-3



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Frank Wu 11/07/11

CHECKED BY: DATE

Jacky Chen 11/07/11

APPROVED BY: DATE

Tony Kao 11/07/11

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

Toggle PUSH SWITCH

AS-04

AS-04

SIZE

A4

VER

A