
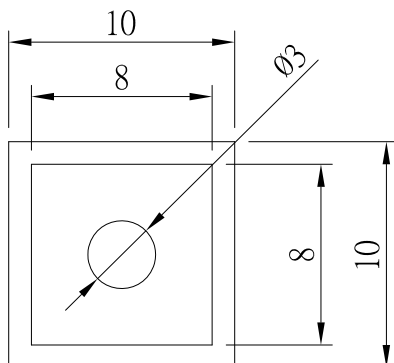


CIRCUIT DIAGRAM

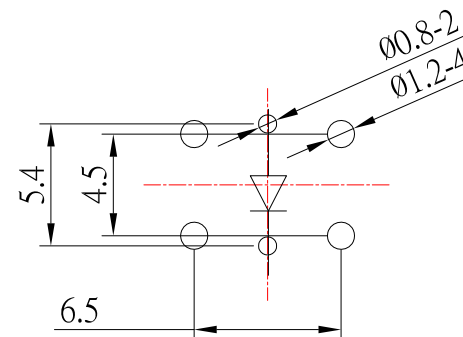

MOUNTING PATTERN

COLOR OF LED



0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

CAP Color

0	Without	1	Red
2	Green	3	Yellow
4	Ivory	5	Gray
6	Black		

Housing Color

0	Without
5	Gray
6	Black

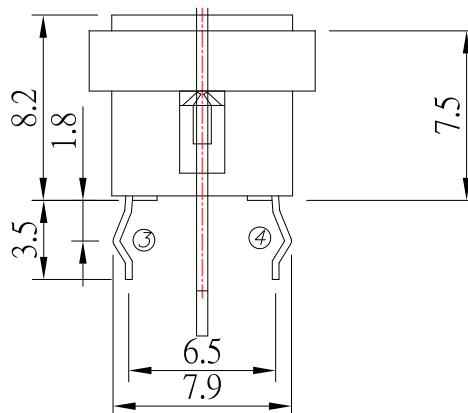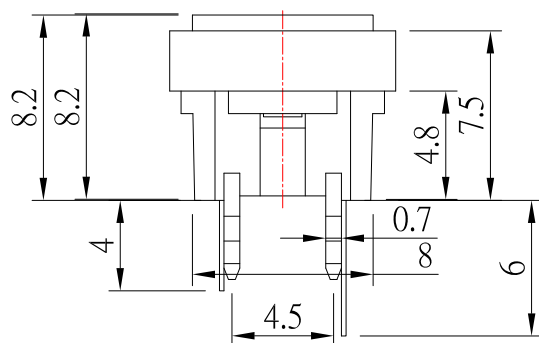

SPECIFICATIONS

1. Rating: 12VDC 50mA.
2. Operating force: 200±50gf.
3. Contact resistance: 100m ohm(Max).
4. Operating life: 100,000 cycles.
5. Total travel: 0.25±0.1mm



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/15/14
DATE: 05/15/14
DATE: 05/15/14

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SW WITH LED
TS-x-Ax-Bx
TS-x-Ax-Bx

SIZE: A4
VER: R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增 LED和CAP和HOUSING 的COLOR	Jack	051514