

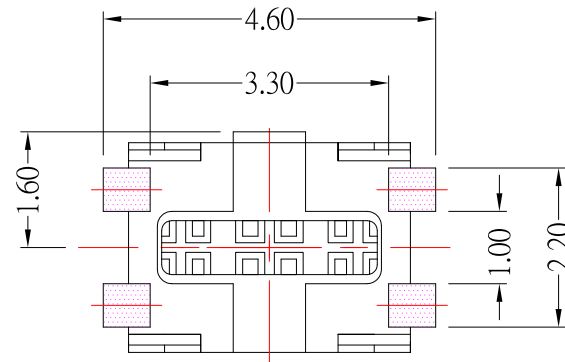

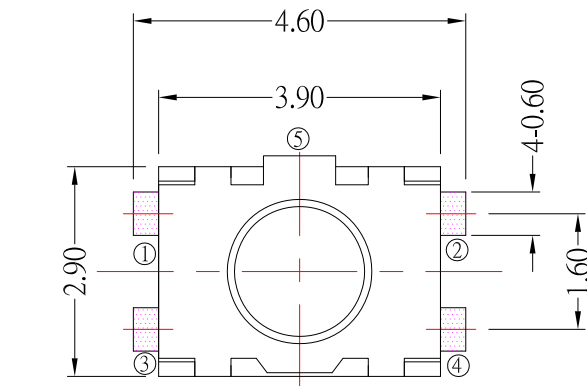


CIRCUIT DIAGRAM

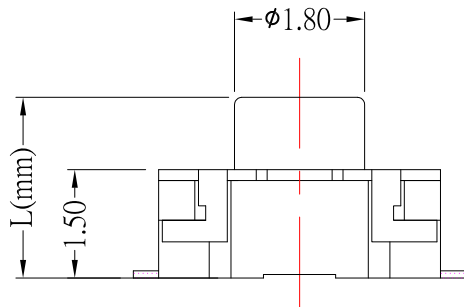

MODEL NO.	L (mm)
TS-A85BPG-x-1.8	1.8
TS-A85BPG-x-2.0	2.0
TS-A85BPG-x-2.5	2.5
TS-A85BPG-x-7.0	7.0

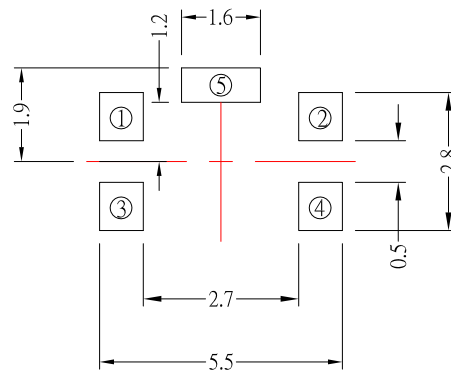

SMD REFLOW PATTERN

SPECIFICATIONS

Rating	DC 12V 50mA Max.				
Circuit	1C - 1P				
Contact Resistance	100mΩ Max.				
Travel	0.15 ± 0.1mm				
Operating Force	0	100 ± 30gf	1	130 ± 30gf	2 160 ± 50gf 3 250 ± 50gf
Operating Life (cycles)	100,000				



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 10/15/15
DATE: 10/15/15
DATE: 10/15/15

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE: TACT SWITCH
DWG NO.: TS-A85BPG-x-x-S126
PART NO.: TS-A85BPG-x-x-S126

SIZE: A4
VER: A4

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新"L"选项	Jack	101515
3	更新Travel及新增"L"选项	Jack	072313
2	更新圖面背面圖	Jack	071513
1	新增OF选项	Jack	070413