
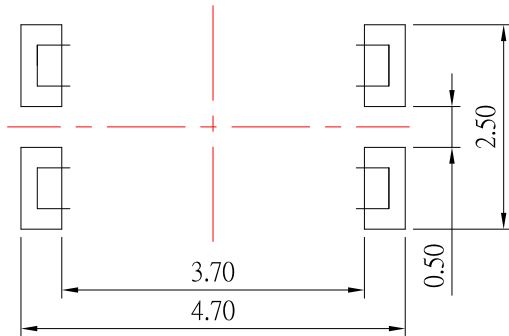
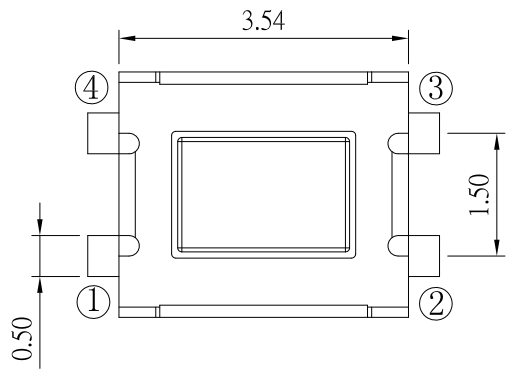
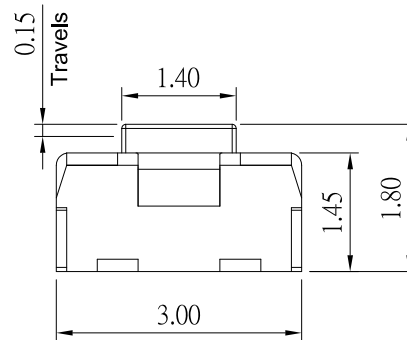


CIRCUIT DIAGRAM

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	0.05A 12V DC
Insulation Resistance	100M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	50m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	50,000 cycles

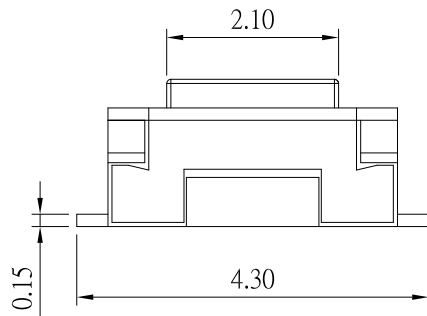

E	THERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	SUS	
B	BASE	1	LCP	White
A	STEM	1	PA6T	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	04/01/15			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	04/01/15			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A83-6-S246
Tony Kao	04/01/15	1 : 1		
		SHEET NO.	PART NO.	TS-A83-6-S246
		1 of 1		