


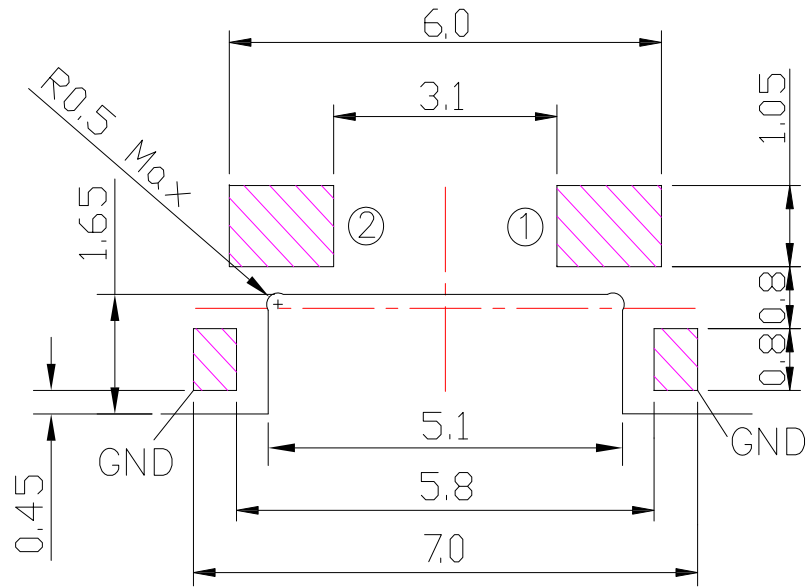
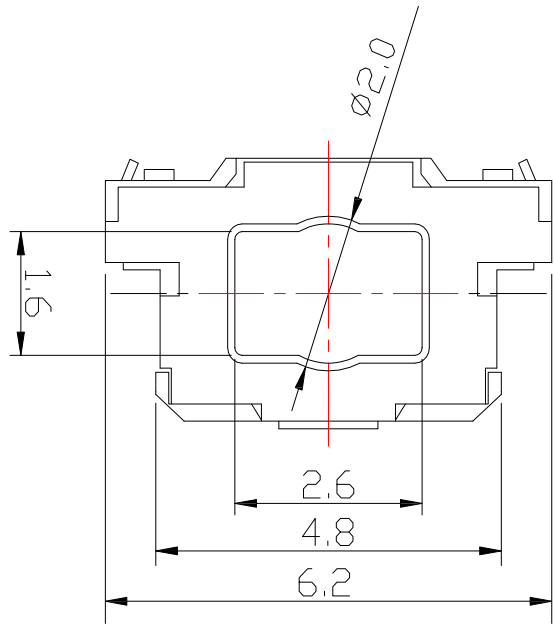


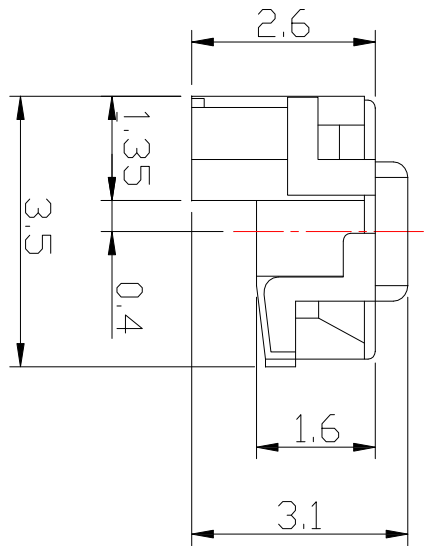

P.C.B LAYOUT



CIRCUIT DIAGRAM

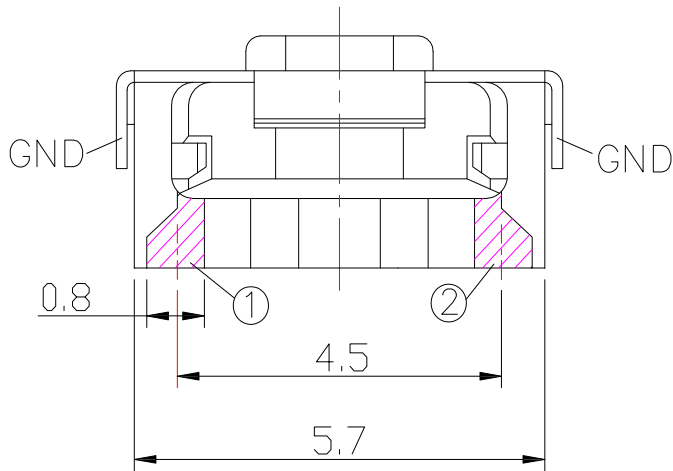

SPECIFICATIONS

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Insulation Resistance	100MΩ Min		
Travel	0.25±0.1mm		
Operating Force	2	160 ± 50gf	3 250 ± 50gf
Operating Life (cycles)	100,000		
Operating Temperature Range	-20° ~ +70° C		
Storage Temperature Range	-40° ~ +85° C		

3	更新PCB LAYOUT	Jack	120715
2	新增PIN标示	Jack	110215
1	更新SPEC	Jack	040914
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/07/15	FINISH	MODLE	
CHECKED BY:	DATE	SCALE	DWG NO.	
Jacky Chen	12/07/15	SHEET NO.	PART NO.	
APPROVED BY:	DATE	1 : 1	TS-A34-x-S138	SIZE
Tony Kao	12/07/15	1 of 1	TS-A34-x-S138	A4
				VER
				R3