




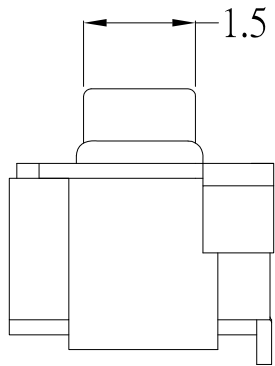


DIMENSIONS

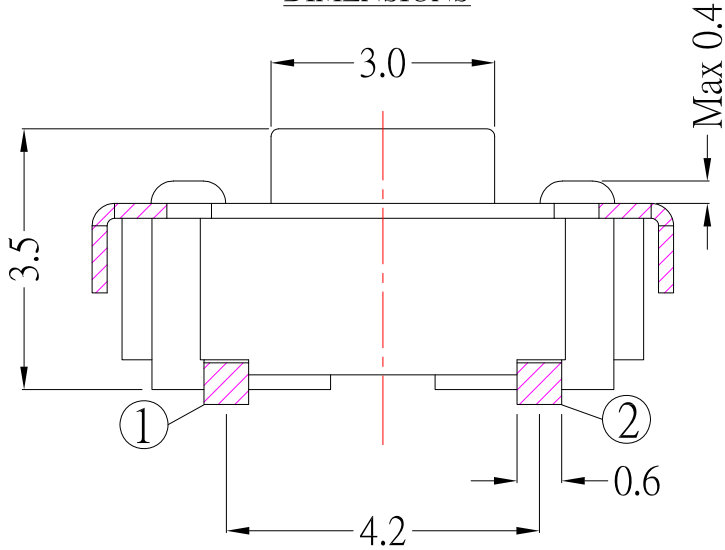


CIRCUIT DIAGRAM



P.C.B. LAYOUT MOUNTING PATTERN

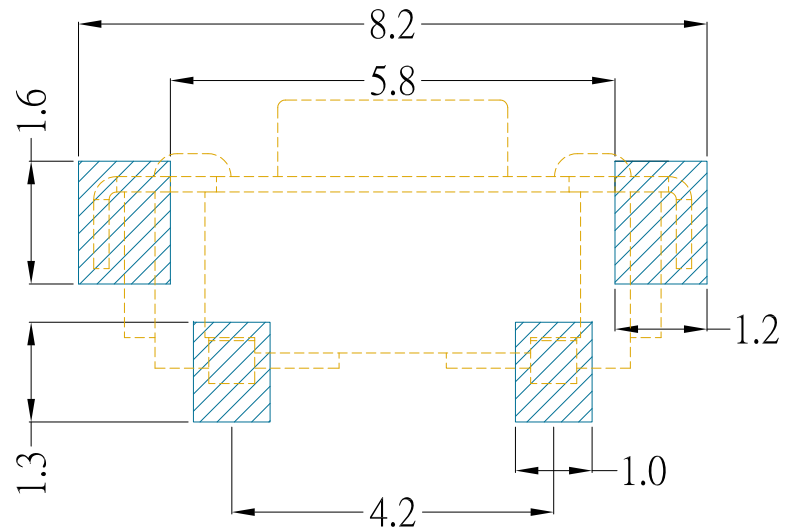

PRODUCT IMAGE

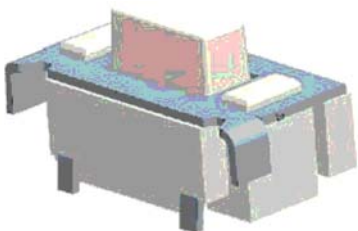

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	100mΩ Max.		
Travel	0.25 ± 0.1mm		
Operating Force	2	160 ± 30gf	3 250 ± 50gf
Operating Life (cycles)	50,000		30,000



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Frank Wu
CHECKED BY:
Jacky Chen
APPROVED BY:
Tony Kao

DATE
02/24/12
DATE
02/24/12
DATE
02/24/12

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH
TS-A12-x-S126
TS-A12-x-S126

SIZE
A4
VER
A