


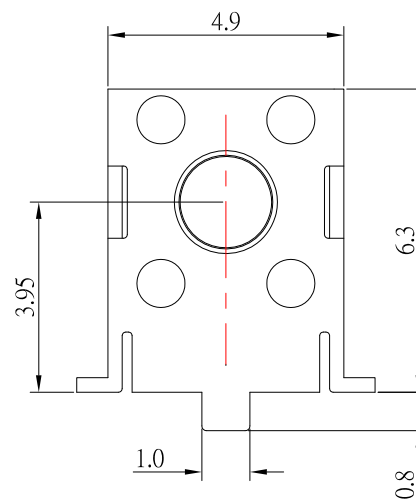


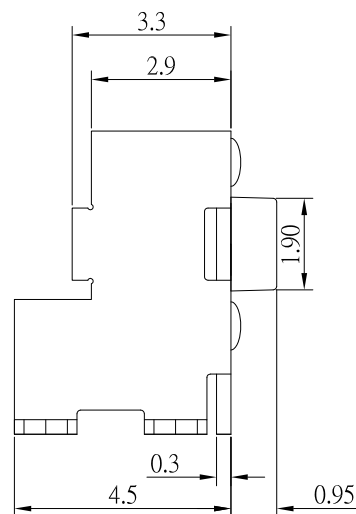

CIRCUIT DIAGRAM

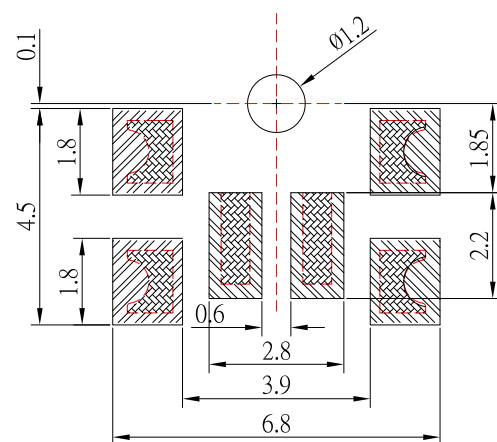

PCB LAYOUT

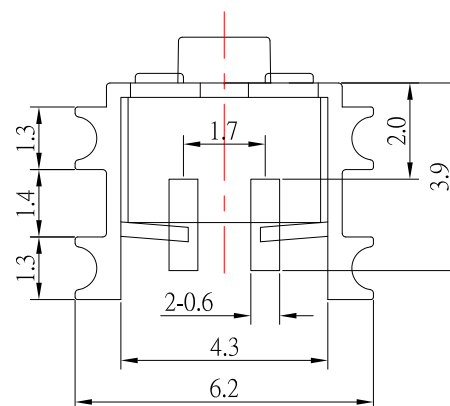

SPECIFICATIONS

Rating	DC 12V 50mA.		
Insulation Resistance	50 M Ω Min.		
Contact Resistance	100 m Ω Max.		
Operating Force	2	180 $\pm$ 50gf	3 260 $\pm$ 50gf
Operating Life (cycles)	80,000		

E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	BRASS	Ag plated
B	BASE	1	PPA	Black
A	STEM	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu 05/06/15

CHECKED BY:

Jacky Chen 05/06/15

APPROVED BY:

Tony Kao 05/06/15

DATE

DATE

DATE

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH

TS-A09US-x-S246

TS-A09US-x-S246

SIZE

VER

2	更新材質	Jack	050615
1	更新為A0版	Jack	121714
ITEM NO.	DESCRIPTION	DRAWN	DATE