
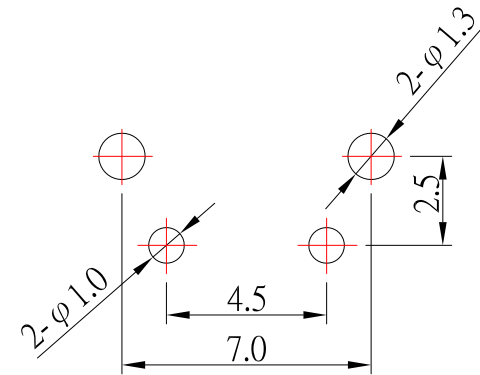
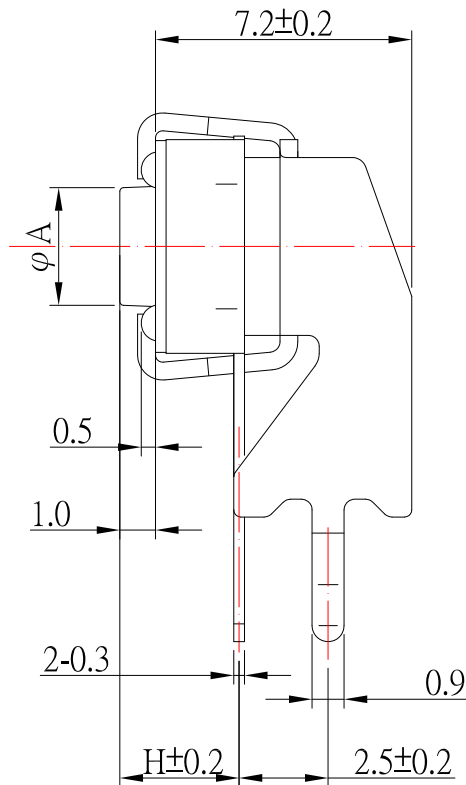


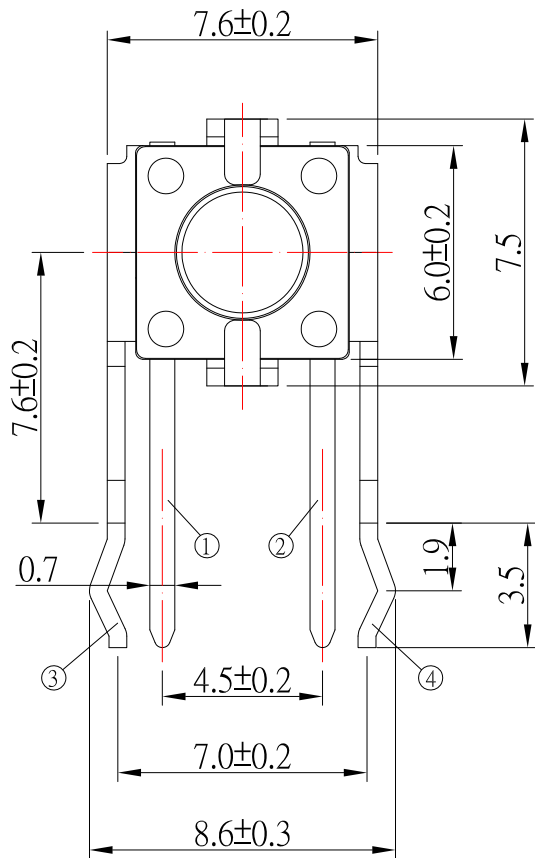


P.C.B LAYOUT

MODEL NO.	TS-A05V	TS-05VAJ	TS-A05VA	TS-05VB	TS-A05VC	TS-A05VD
H (mm)	3.15	3.35	3.85	5.85	6.85	8.35
φ A	3.50	3.30	3.40	3.30	3.30	3.0

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	100mΩ Max.		
Travel	0.25 ± 0.1mm		
Operating Force	2	160 ± 50gf	3 250 ± 50gf
Operating Life (cycles)	100,000	80,000	



CIRCUIT DIAGRAM



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
11/07/19
11/07/19
11/07/19

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SW 支架高 :11.25mm
TS-A05Vx-x-S138
TS-A05Vx-x-S138

SIZE
A4
VER
R3

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	新增选项	Jack	110719
2	更新画面	Jack	031419
1	更新画面	Jack	083013