

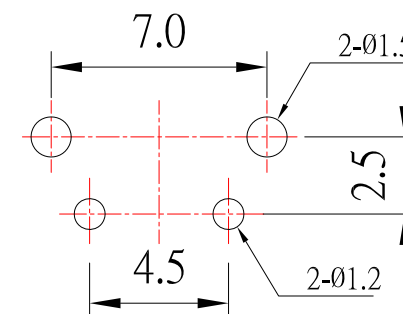


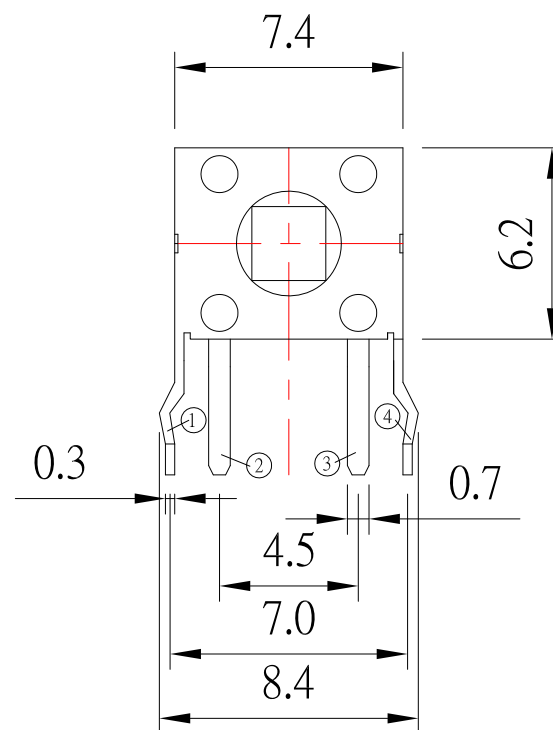

P.C.B LAYOUT

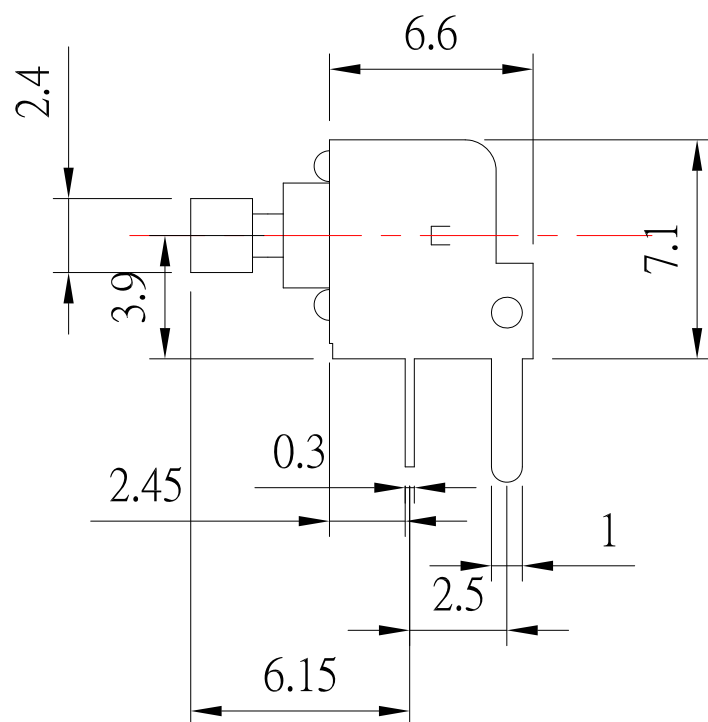

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA Max.		
Contact Resistance	50mΩ Max.		
Travel	0.25 ± 0.1mm		
Operating Force	1 130 ± 30gf	2 160 ± 50gf	3 250 ± 50gf
Operating Life (cycles)	100,000		80,000



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
12/16/15

CHECKED BY:
Jacky Chen

DATE
12/16/15

APPROVED BY:
Tony Kao

DATE
12/16/15

MAT'L

FINISH

SCALE

TITLE

MODLE

DWG NO.

SWITCH

TACT SWITCH

PART NO.

SIZE

A4

VER

TS-A02VT-x-S090

TS-A02VT-x-S090

A2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增尺寸6.6	Jack	121615
1	新增尺寸3.9	Jack	093015