



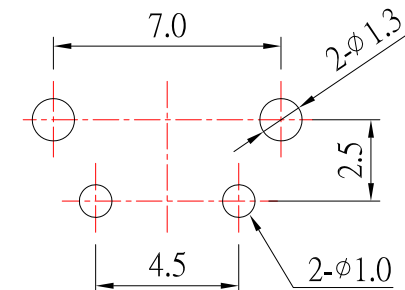


TS-A02Vx-x-x-S090

MODEL No | | Knob Color :
Operating Force



Black : Blank
White : W
Gray : GE
Red : R
Brown : BR

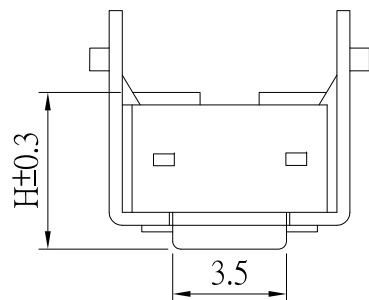

P.C.B LAY OUT

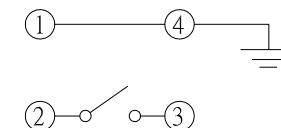

CIRCUIT DIAGRAM

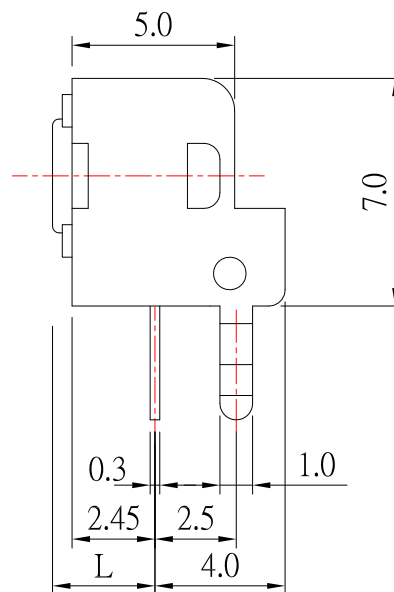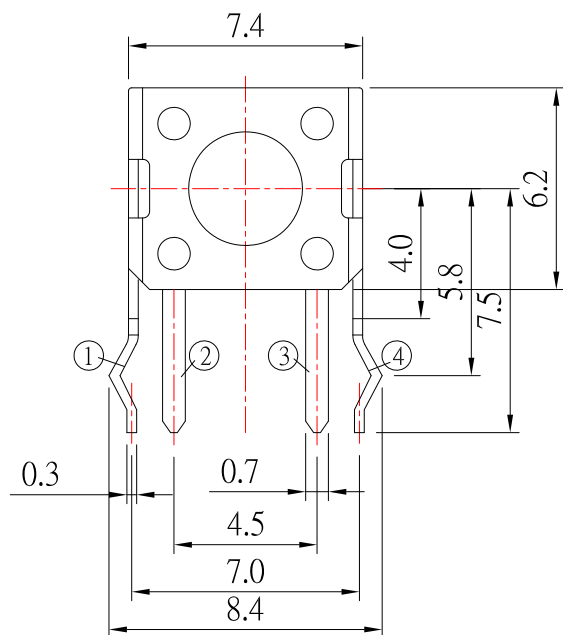

MODEL NO.	TS-A02V	TS-A02VA	TS-A02VB	TS-A02VC	TS-A02VD	TS-A02VE	TS-A02VF	TS-A02VG	TS-A02VH
L (mm)	3.15	3.85	5.85	6.85	8.35	6.15	11.35	11.85	15.85
H (mm)	4.30	5.00	7.00	8.00	9.50	7.30	12.50	13.00	17.00

SPECIFICATIONS

Rating	DC 12V 50mA Max.			
Contact Resistance	50mΩ Max.			
Travel	0.25 ± 0.1mm			
Operating Force	0 100 ± 30gf	1 130 ± 30gf	2 160 ± 50gf	3 250 ± 50gf
Operating Life (cycles)	100,000			80,000



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
04/09/20
DATE
04/09/20
DATE
04/09/20

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH
TS-A02Vx-x-x-S090
TS-A02Vx-x-x-S090

SIZE
A4
VER
R10