





DIMENSIONS

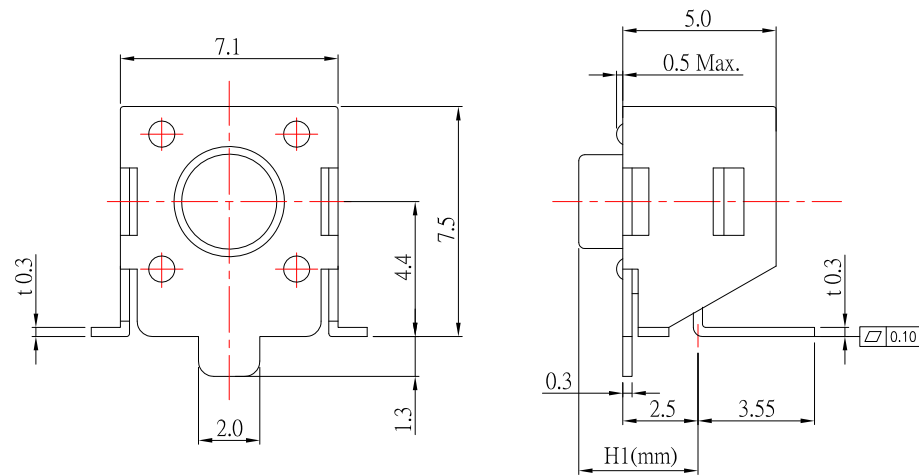

PRODUCT IMAGE

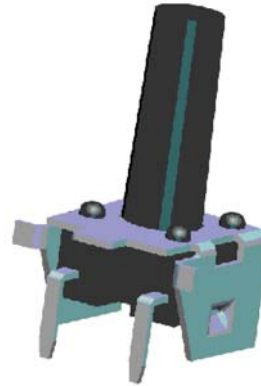


MODEL CODE


MODEL	H1	H2	ΦA
TS-A02U	3.15	4.3	3.5
TS-A02UA	3.85	5.0	3.5
TS-A02UB	5.85	7.0	3.4
TS-A02UC	6.85	8.0	3.4
TS-A02UD	8.35	9.5	3.4
TS-A02UE	6.15	7.3	3.4
TS-A02UF	11.35	12.5	3.0
TS-A02UG	12.35	13.5	3.0
TS-A02UI	15.85	17.0	3.0
TS-A02UJ	15.15	16.3	3.0
TS-A02UK	11.85	13.0	3.0
TS-A02UM	9.85	11.0	3.0
TS-A02UST	□ 2.4 X 2.4		

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

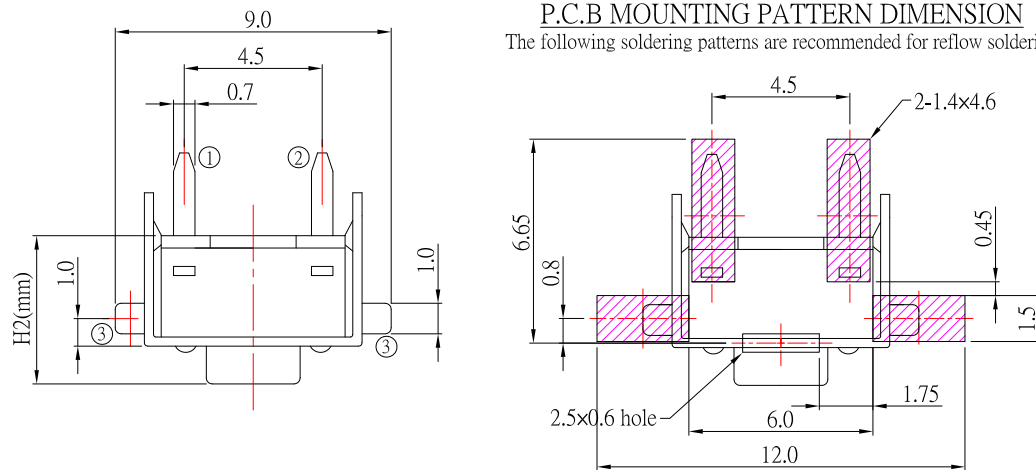

CIRCUIT DIAGRAM



SPECIFICATIONS

Rating	DC 12V 50mA Max.			
Contact Resistance	100mΩ Max.			
Travel	0.25 ± 0.1mm			
Operating Force	2	160 ± 50gf	3	260 ± 50gf
Operating Life (cycles)	100,000 (2-160 ± 50gf)			
	80,000 (3-260 ± 50gf)			



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch JacK Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/12/14
DATE: 11/12/14
DATE: 11/12/14

MAT'L		TITLE	SWITCH
FINISH		MODLE	TACT SWITCH
SCALE	1 : 1	DWG NO.	TS-A02Ux-x-S126
SHEET NO.	1 of 1	PART NO.	TS-A02Ux-x-S126

SIZE
A4
VER
A3