



PRODUCT IMAGE






CIRCUIT DIAGRAM

MODEL No	L (mm)
TS-A01V	3.15
TS-A01VA	3.85

SPECIFICATIONS

Rating	DC 12V 50mA Max.			
Contact Resistance	100mΩ Max.			
Travel	0.25 ± 0.1mm			
Operating Force	0	100 ± 30gf	1	130 ± 30gf
	2	180 ± 30gf	3	250 ± 50gf
Operating Life (cycles)	50,000(100±30gf,130 ± 30gf,180 ± 30gf)			
	30,000 (250 ± 50gf)			

PCB LAYOUT
MOUNTING PATTERN

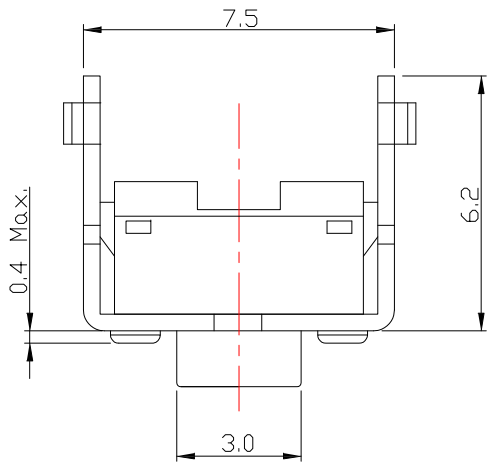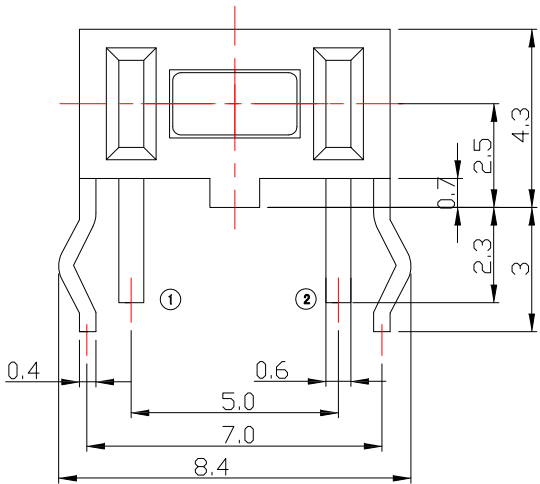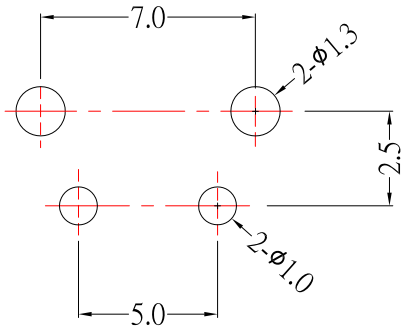

6	更新樣式	Jack	041519
5	更新PIN腳樣式	Jack	011119
4	更新圖面	Jack	112416
3	新增尺寸	Jack	032515
2	SPEC更新	Jack	031913
1	圖面更新	FrankWu	062912
ITEM NO.	DESCRIPTION	DRAWN	DATE

 东莞市高迪电子有限公司 Dong Guan KDRR Electronic Switch JacK Co., Ltd.	TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3°	3RD. ANGEL'S		UNITS	MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	04/15/19			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	04/15/19			
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO. TS-A01Vx-x-S126
Tony Kao	04/15/19	SHEET NO.	1 of 1	PART NO. TS-A01Vx-x-S126
				SIZE A4
				VER R6