


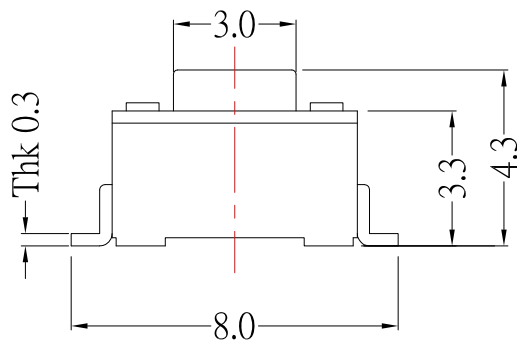


DIMENSIONS

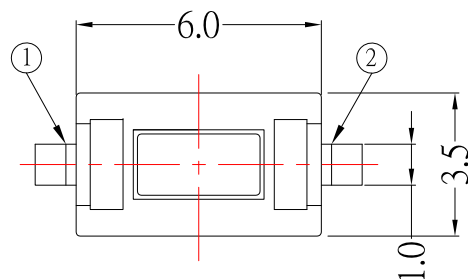


P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

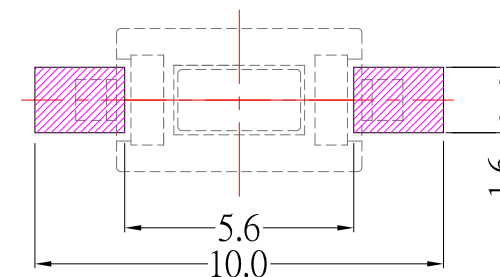

PRODUCT IMAGE




SPECIFICATIONS

Rating	DC 12V 50mA Max.			
Contact Resistance	100mΩ Max.			
Travel	0.25 ± 0.1mm			
Operating Force	1	130 ± 30gf	2	160 ± 50gf
Operating Life (cycles)	50,000 (130±30gf,160±50gf)			
	30,000 (250 ± 50gf)			
Knob / Case Color	White			

MODEL	H (mm)
TS-A01NE	4.3
TS-A01NEA	5.0

CIRCUIT DIAGRAM



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 03/05/15

CHECKED BY: Jacky Chen
DATE: 03/05/15

APPROVED BY: Tony Kao
DATE: 03/05/15

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH

TS-A01NEX-x-W-S126

TS-A01NEX-x-W-S126

SIZE

A4

VER

R