


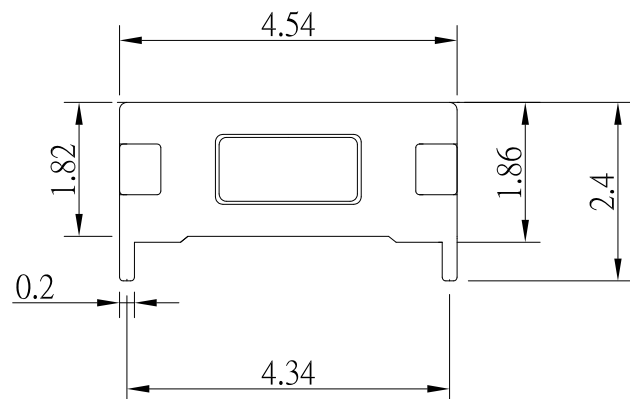


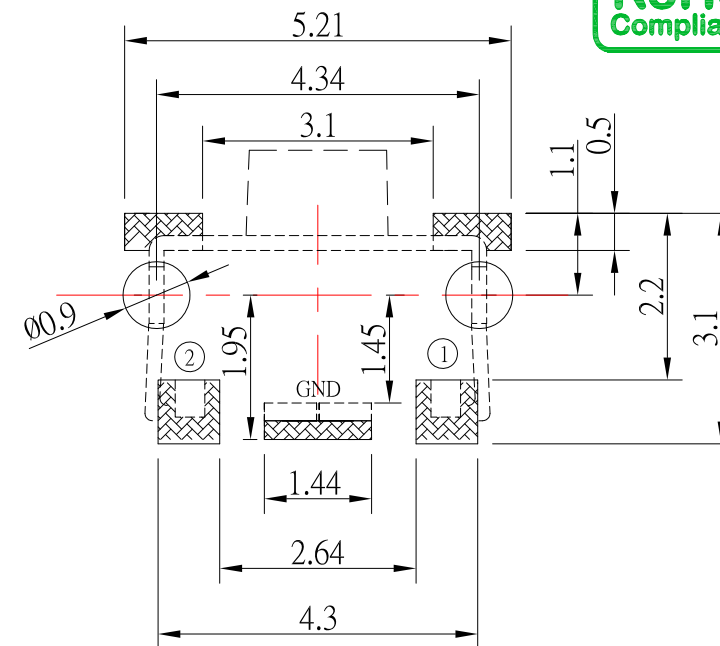

CIRCUIT DIAGRAM



P.C.B. LAYOUT MOUNTING PATTERN

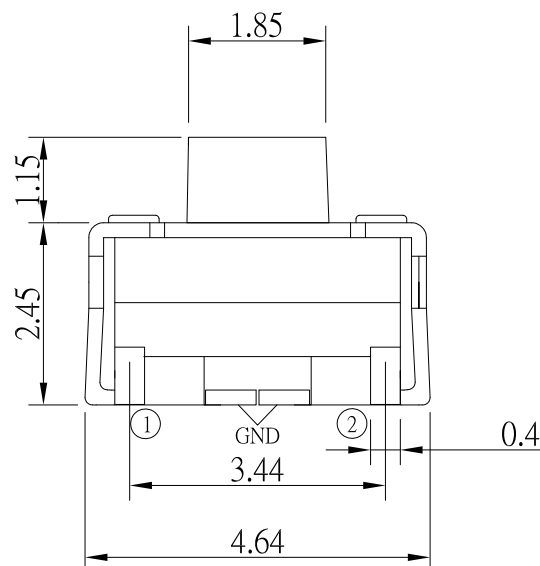

SPECIFICATIONS

Rating	DC 12V 50mA		
Contact Resistance	100m Ω Max.		
Insulation Resistance	50M Ω Min.		
Operating Force	2	150 $\pm$ 50gf	3 240 $\pm$ 50gf
Operating Life (cycles)	70,000	20,000	



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
06/03/15
DATE
06/03/15
DATE
06/03/15

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH
TS-A00AD-x-S246
TS-A00AD-x-S246

SIZE
A4
VER
A3