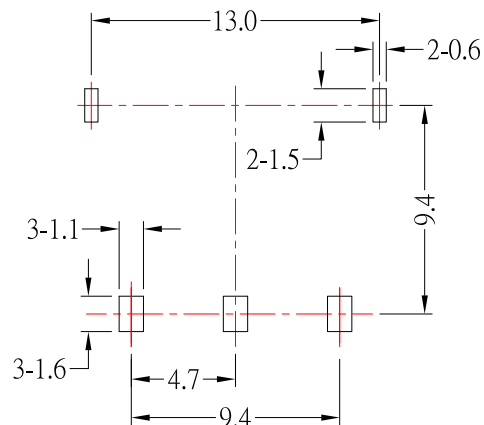
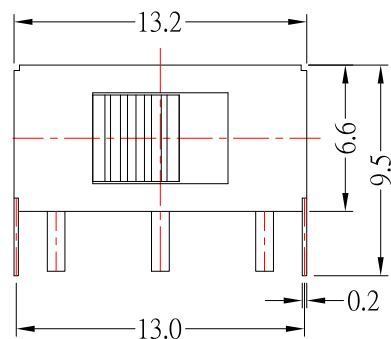
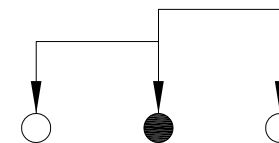
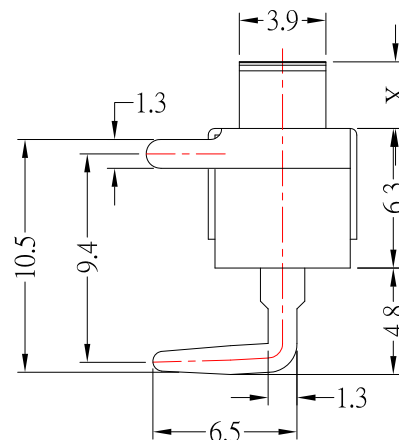
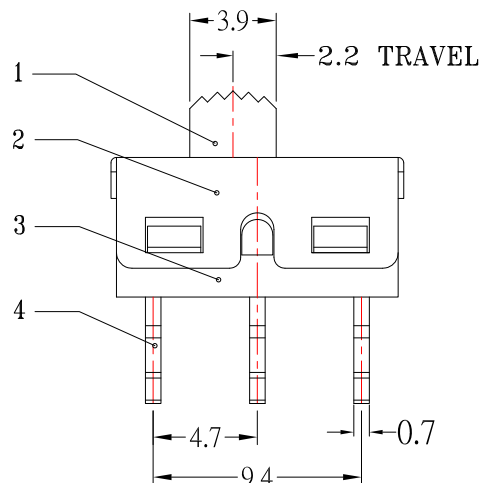


P.C.B LAYOUT
BOTTOM VIEW

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

- 1.RATING: 125VAC, 1.5A
- 2.CIRCUIT: 1C-2P
- 3.TIMING: NON SHORTING
- 4.TRAVEL: 2.2 mm
- 5.OPERATING FORCE: 300 ± 100 gf
- 6.CONTACT RESISTANCE: 200 m Ω
- 7.LIFE:10,000 CYCLES

Model No.	X(mm)
SS-12D11-G3	3mm
SS-12D11-G4	4mm
SS-12D11-G5	5mm
SS-12D11-G6	6mm
SS-12D11-G7	7mm
SS-12D11-G8	8mm
SS-12D11-G9	9mm

7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	3	Ag PLATED
3	CASE	PA9T	1	BLACK
2	COVER	SUS	1	NATURAL
1	KNOB	PA9T	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISH

8	更新柄長選項	Jack	011420
7	新增PCB LAYOUT尺寸	Jack	010319
6	更新尺寸	Jack	112118
5	更新Rating	Jack	090418
4	更新材質	Jack	111517
3	新增PCB LAYOUT尺寸	Jack	092217
2	更新MODLE及PCB LAYOUT	Jack	012115
1	更新CONTACT RESISTANCE	Jack	111914
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°3RD.
ANGEL'S

UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony KaoDATE: 01/14/20
DATE: 01/14/20
DATE: 01/14/20MAT'L
FINISH
SCALE1 : 1
SHEET NO.TITLE
MODLE
DWG NO.SWITCH
SLIDE SWITCH
SS-12D11-Gx-S191

PART NO. SS-12D11-Gx-S191

SIZE
A4
VER
R8