





SCHEMATIC



P.C.B LAYOUT MOUNTING PATTERN

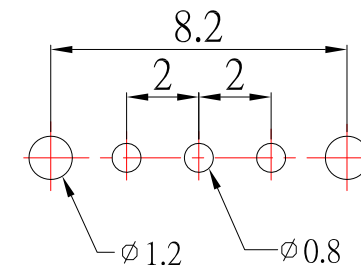

MODEL NO.	L(mm)
SS-12D02-G2-S191	2mm
SS-12D02-G3-S191	3mm
SS-12D02-G4-S191	4mm
SS-12D02-G5-S191	5mm
SS-12D02-G6-S191	6mm
SS-12D02-G7-S191	7mm
SS-12D02-G8-S191	8mm
SS-12D02-G9-S191	9mm

SPECIFICATIONS

Rating	DC 50V 0.3A
Circuit	1P - 2T
Timing	Non - Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	300gf ±100gf
Operating Life (cycle)	10,000 Min.

6	Spring Plate	1	SUS	Natural
5	Contact Clip	1	PBS	Ag-Plating
4	Terminal	1	Brass	Ag-Plating
3	Base	1	Phenolic Resin	Natural
2	Frame	1	SPCC	Ni-Plating
1	Knob	1	POM	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 03/20/14
DATE: 03/20/14
DATE: 03/20/14

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE: SLIDE SWITCH
DWG NO. SS-12D02-Gx-S191
PART NO. SS-12D02-Gx-S191

SIZE: A4
VER: A1

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	新增SPEC及Contact Resistance:200mΩ	Jack	032014
2	更新PIN的長度	Jack	082813
1	更新材質	Jack	072613