
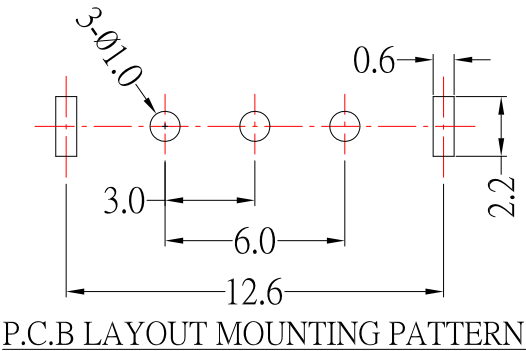
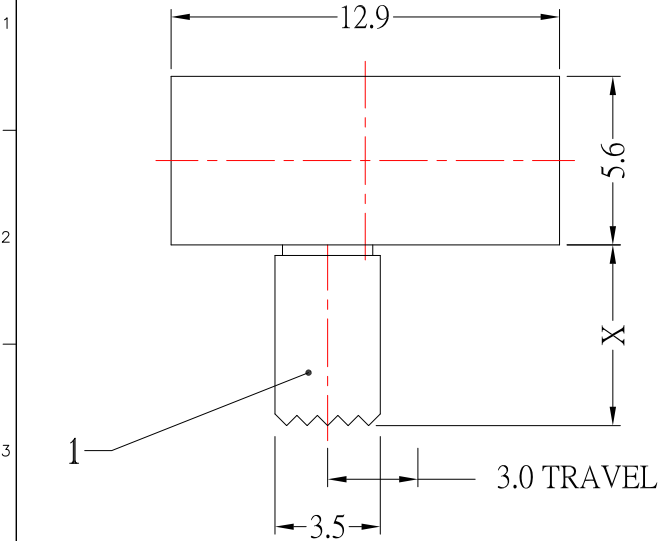
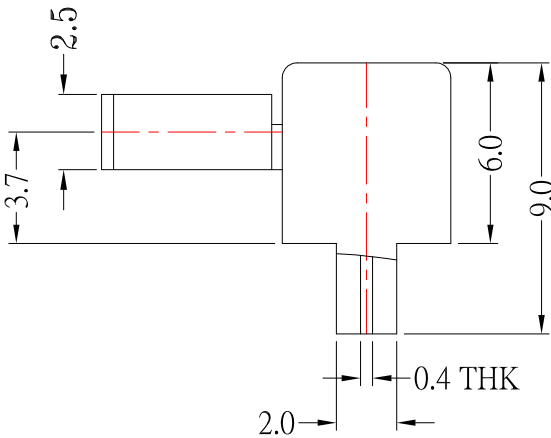


MODEL NO.	X(mm)
SK-12E14-G2-S191	2mm
SK-12E14-G3-S191	3mm
SK-12E14-G4-S191	4mm
SK-12E14-G5-S191	5mm
SK-12E14-G6-S191	6mm
SK-12E14-G7-S191	7mm
SK-12E14-G8-S191	8mm
SK-12E14-G9-S191	9mm

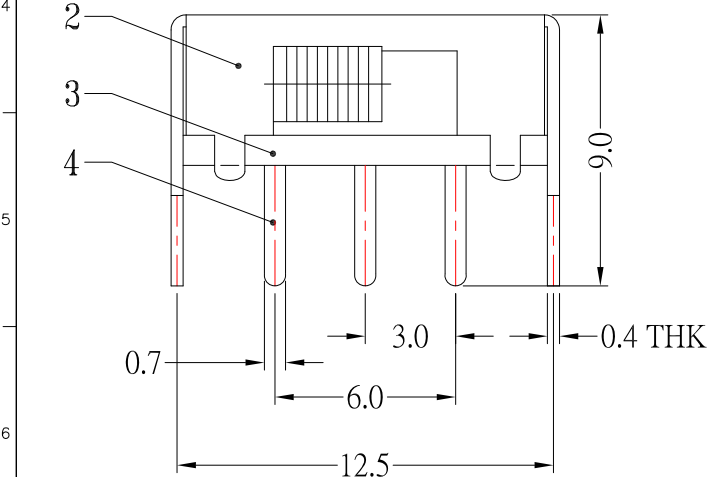

SPECIFICATIONS

Rating	DC 50V 0.5A
Circuit	1P - 2T
Timing	Non - Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	200gf ±80gf
Operating Life (cycle)	10,000 Min.

6	Spring	1	Stainless Steel	Natural
5	Contact	1	Brass	Ag-Plating
4	Terminal	3	Brass	Ag-Plating
3	Base	1	Phenolic Resin	Natural
2	Frame	1	SPCC	Ni-Plating
1	Knob	1	POM	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

3	更新圖面尺寸	Jack	030515
2	新增SPEC	Jack	111914
1	更新材質	Jack	061913
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch JacK Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	03/05/15			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Jacky Chen	03/05/15			
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO. SK-12E14-Gx-S191
Tony Kao	03/05/15			
		SHEET NO.	1 of 1	PART NO. SK-12E14-Gx-S191
				SIZE A4
				VER R3