



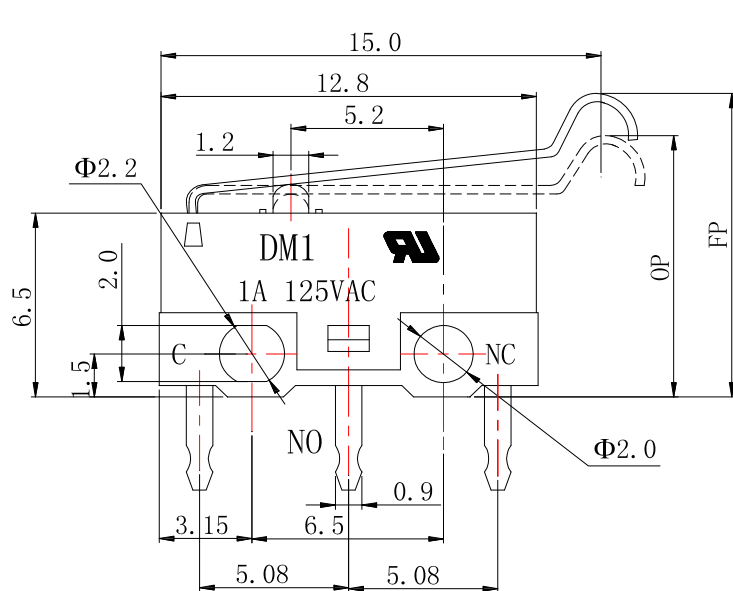

1. Functional spec.	
1.1 Rated Voltage	AC125V 1A / DC5V 30mA
1.2 Contact Resistance	≤100mΩ
1.3 Operating Force	30 ± 15 gf
1.4 Free Position	12.8 ± 0.8 mm
1.5 Operating Position	10.8 ± 0.8 mm
2.Reliable Rating	
2.1 Mechanical Life	500,000 CYCLES
2.2 Electrical Life	10,000 / 500,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC500V 1 minute
2.5 Soldering Temper	250°C Max 3 Sec.
2.6 Operating Temper	-25°C ~ +65°C
2.7 Ambient Humidity Used	<85%RH

SCHEMATIC



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH
Frank Wu	11/07/11	FINISH		MODLE	MICRO SWITCH
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	DM1-02P
Jacky Chen	11/07/11	SHEET NO.	1 of 1	PART NO.	DM1-02P
APPROVED BY:	DATE				
Tony Kao	11/07/11				

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------