

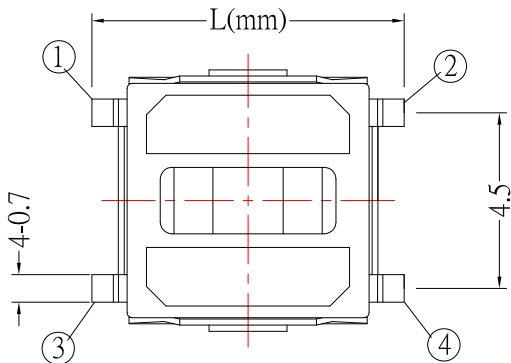
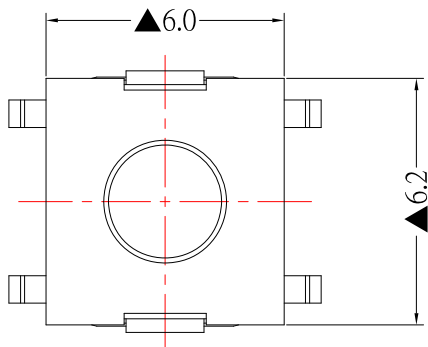



DIMENSIONS

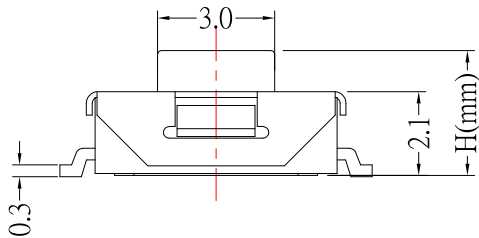



PRODUCT IMAGE

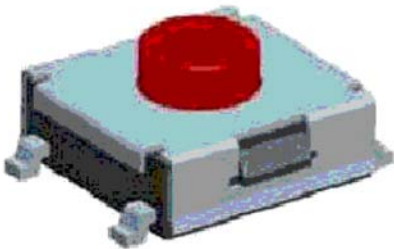

CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN DIMENSION

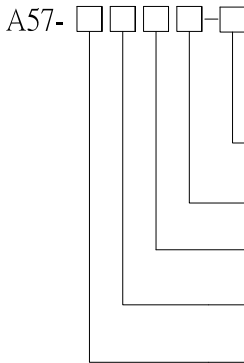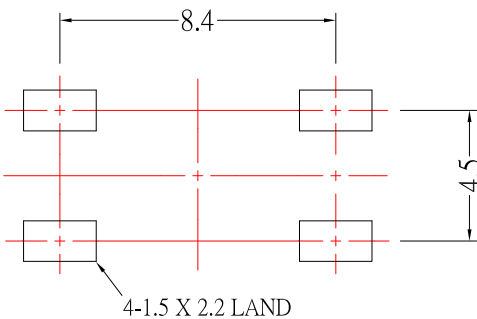

Item	Code
Operoling Force (130gf,160gf,250gf)	Code
With / Without Ground Cover	P.D
With / Without Embossing Cose	E.N
Stem Height (H):2.5mm , 3.1mm	S.H
Ter" Lengh(L):8.0mm , 10.0mm	A.B

SPECIFICATIONS

Rating	DC 12V 50mA Max.			
Contact Resistance	100mΩ Max.			
Travel	0.25 ± 0.1mm			
Operating Force	1	130 ± 30gf	2	160 ± 50gf
	3	250 ± 50gf		
Operating Life (cycles)	100,000			

▲ Dimension without included cover.



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu
CHECKED BY:
Jacky Chen
APPROVED BY:
Tony Kao

DATE
09/30/15
DATE
09/30/15
DATE
09/30/15

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
TACT SWITCH
TS-A57AxND-x-S126
TS-A57AxND-x-S126

SIZE
A4
VER
A1