

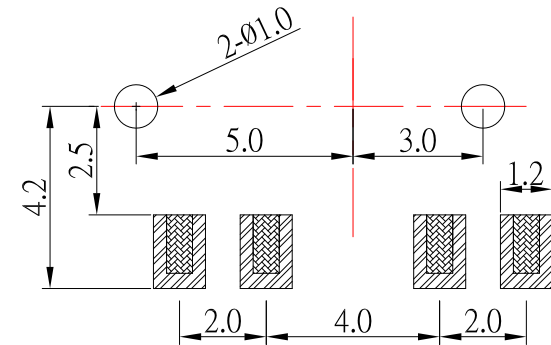
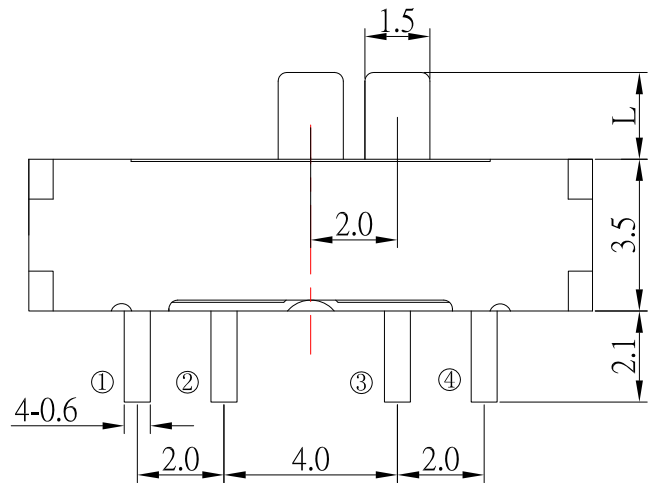
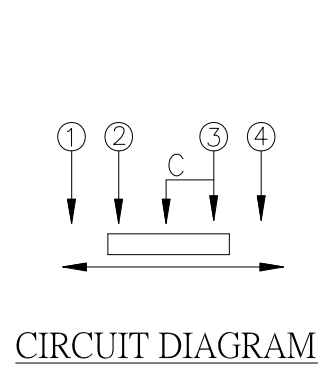


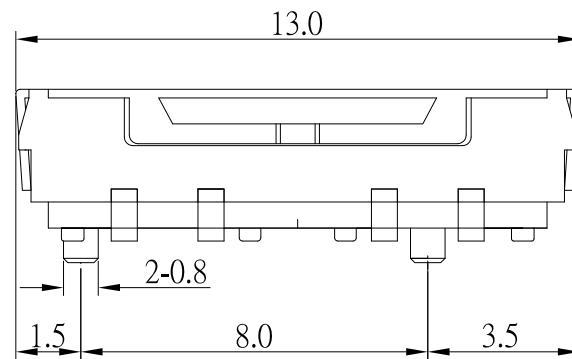

P.C.B LAND PATTERN

MODEL NO.	SS-C80-S246	SS-C80A-S246
L (mm)	2.0	4.0

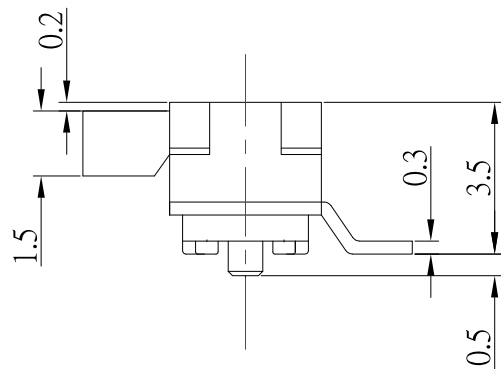

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	230 $\pm$ 50gf
Operating Life	10,000 cycles

E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BEUC	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch JacK Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	10/22/14			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Jacky Chen	10/22/14			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-C80x-B-S246
Tony Kao	10/22/14	1 : 1		
		SHEET NO.	PART NO.	SS-C80x-B-S246
				SIZE
				A4
				VER
				R1