

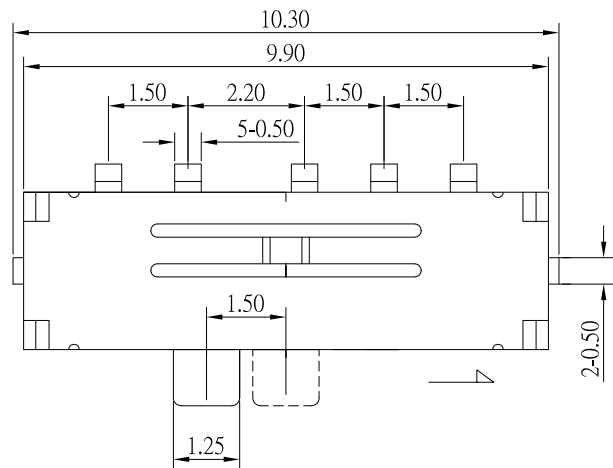
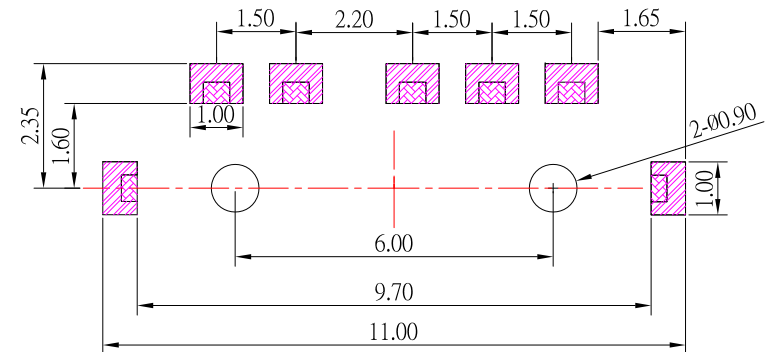


CIRCUIT DIAGRAM

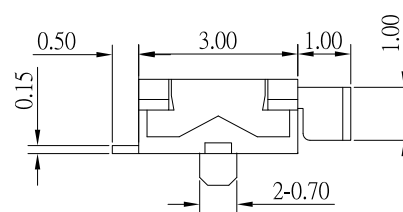

P.C.B LAND PATTERN

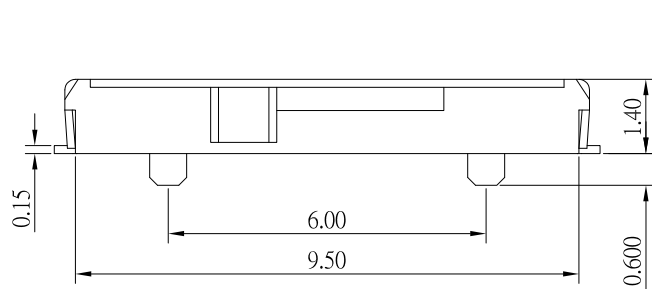

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	120 $\pm$ 50gf
Operating Life	10,000 cycles

F	SPRING	1	SUS	
E	TERMINAL	5	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
03/14/17

CHECKED BY:
Jacky Chen

DATE
03/14/17

APPROVED BY:
Tony Kao

DATE
03/14/17

MAT'L

TITLE
SWITCH

FINISH

MODLE
SLIDE SWICTH 1P3T 右復位

SCALE

1 : 1

DWG NO.
SS-C76R-3-S246

SIZE
A4

SHEET NO.

1 of 1

PART NO.
SS-C76R-3-S246

VER
R1

1	更新材質	Jack	031417
ITEM NO.	DESCRIPTION	DRAWN	DATE