





SS-B90APx-x-S246

Model No.	X (mm)
SS-B90AP	1.5
SS-B90APK	2.0
SS-B90APL	2.5




SLIDER COLOR :

Black : B

White : W

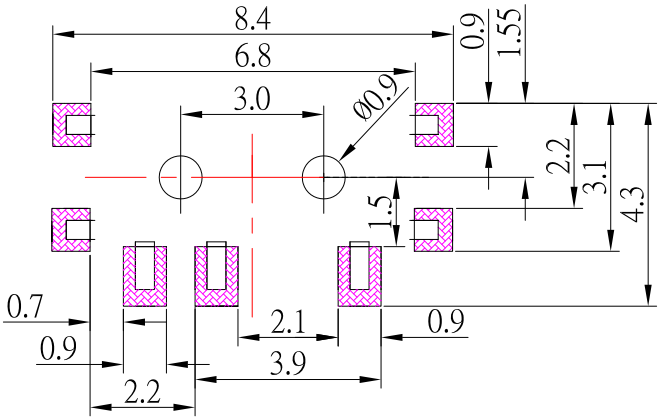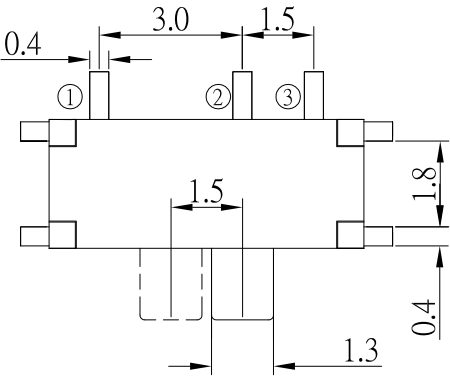

P.C.B LAND PATTERN

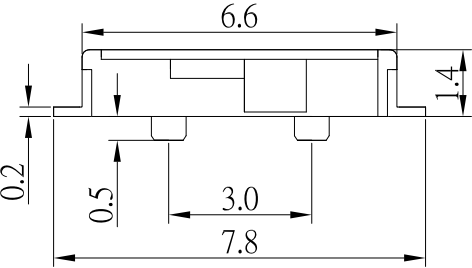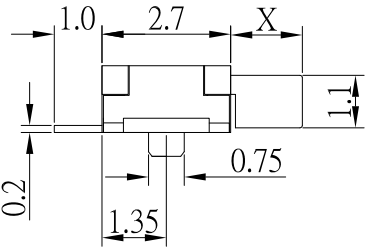

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	160 $\pm$ 100gf
Operating Life	10,000 cycles

F	CLIP	1	BeCu	Ag plated
E	TERMINAL	1	PHOSPHOR BRONZE	Ag plated
D	SPRING	1	SUS	
C	COVER	1	BRASS	Ag plated
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

6	新增尺寸	Jack	032718
5	新增柄長選項	Jack	090116
4	更新為A0版	Jack	012016
3	更新Operating Force : 160 $\pm$ 100gf	Jack	052314
2	更新材質	Jack	031814
1	更新SLIDER COLOR : Black : B	Jack	022614
ITEM NO.	DESCRIPTION	DRAWN	DATE

		东莞市高迪电子有限公司	
		Dong Guan KDRR Electronic Switch JacK Co., Ltd.	
TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 $\pm$ 0.2	3RD. ANGEL'S
		Above 5 ~ 15 $\pm$ 0.3	
		Above 15 ~ 30 $\pm$ 0.4	
		Above 30 ~ 50 $\pm$ 0.5	
		Angle $\pm$ 0.3°	
UNITS	MM		

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	03/27/18			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWICTH
Jacky Chen	03/27/18			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-B90APx-x-S246
Tony Kao	03/27/18	1 : 1		
		SHEET NO.	PART NO.	SS-B90APx-x-S246
		1 of 1		