

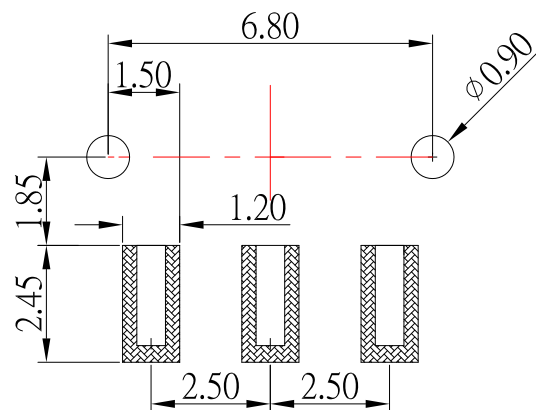




P.C.B LAND PATTERN

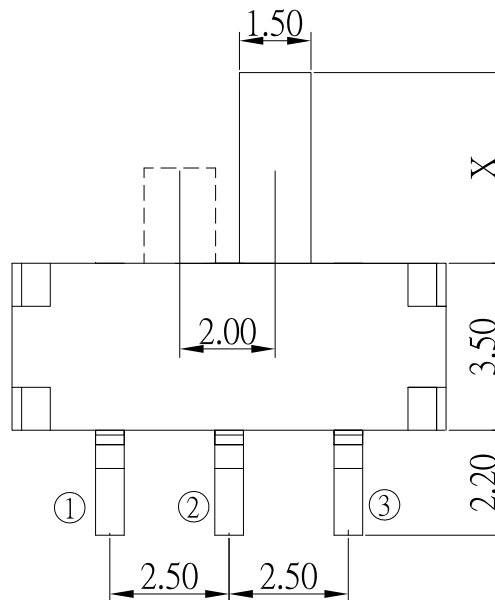

CIRCUIT DIAGRAM



SS-B80x-x-S246

Model No.	X (mm)
SS-B80	2.0
SS-B80A	4.0

SLIDER COLOR :

Black : B

White : W

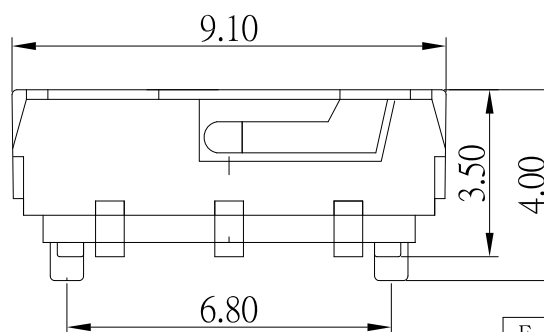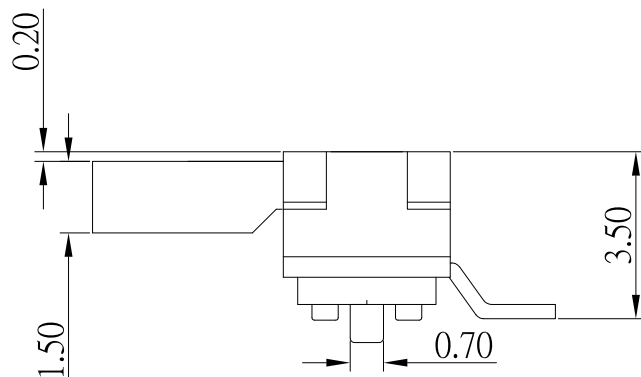

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	100M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	10,000 cycles

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PPA	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

7	更新材質	Jack	110719
6	新增撥柄顏色選項	Jack	102416
5	更新SPEC及材質	Jack	102214
4	更新材質	Jack	040214
3	更新為A0版	Jack	120313
2	更新料號	Jack	070413
1	更新Rating	Jack	062813
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
11/07/19

CHECKED BY:
Jacky Chen

DATE
11/07/19

APPROVED BY:
Tony Kao

DATE
11/07/19

MAT'L		TITLE	SWITCH
FINISH		MODLE	SMT SLIDE SWICTH
SCALE	1 : 1	DWG NO.	SS-B80x-x-S246
SHEET NO.	1 of 1	PART NO.	SS-B80x-x-S246
		SIZE	A4
		VER	A4