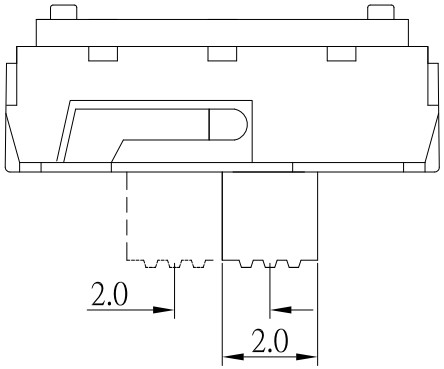

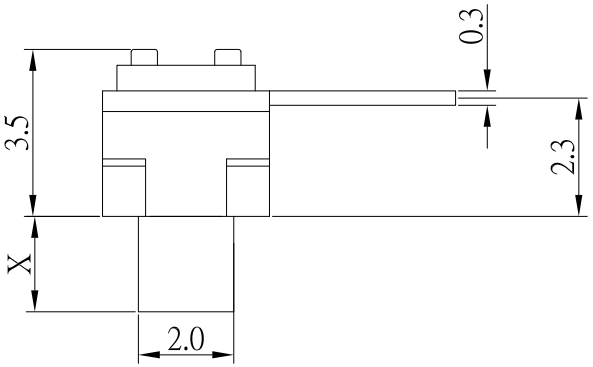



P.C.B LAND PATTERN

SS-B60x-B-S246

Model No.	X (mm)
SS-B60	2.0
SS-B60A	3.0
SS-B60B	4.5
SS-B60C	4.0

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 50gf
Operating Life	10,000 cycles

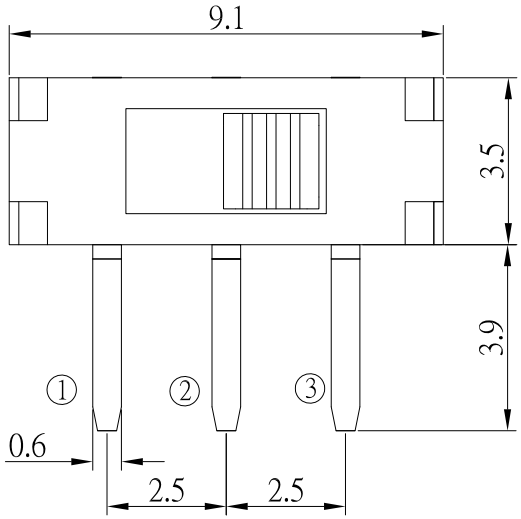



CIRCUIT DIAGRAM

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	Black

ITEM NO.	DESCRIPTION	DRAWN	DATE
7	新增尺寸"2.3"	Jack	041515
6	新增高度選項及更新料號	Jack	031215
5	新增高度選項3.0MM	Jack	111414
4	更新SLIDER COLOR :Black : B	Jack	022614
3	更新SPEC及材質	Jack	071513
2	更新料號	Jack	070413
1	更新Rating	Jack	062813

东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch JacK Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: Jack Lu	DATE 04/15/15	MAT'L	
CHECKED BY: Jacky Chen	DATE 04/15/15	FINISH	
APPROVED BY: Tony Kao	DATE 04/15/15	SCALE 1 : 1	SHEET NO. 1 of 1

TITLE	SWITCH
MODLE	SLIDE SWICTH
DWG NO.	SS-B60x-B-S246
PART NO.	SS-B60x-B-S246
SIZE	A4
VER	R7