

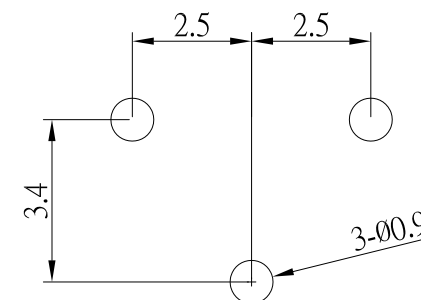


CIRCUIT DIAGRAM

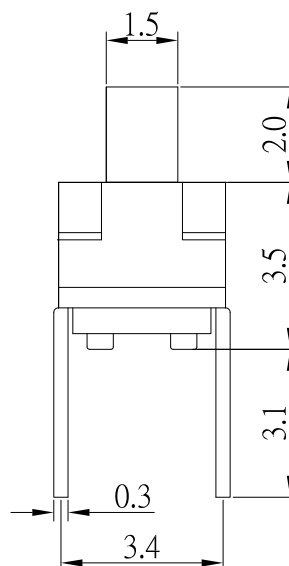

P.C.B LAND PATTERN

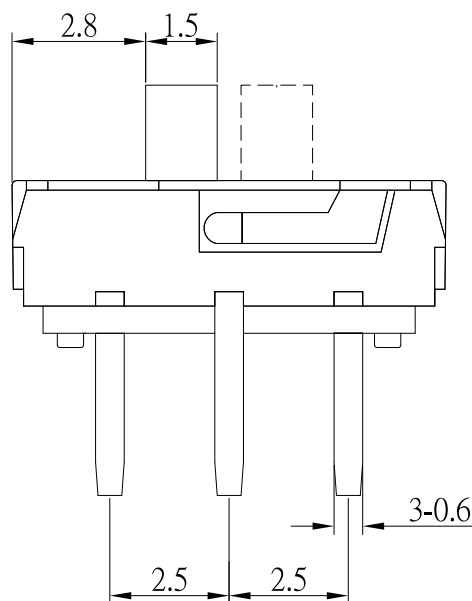

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	10,000 cycles

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BEUC	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
	DRAWN BY:	DATE	MAT'L	TITLE
	Jack Lu	07/18/13		SWITCH
	CHECKED BY:	DATE	FINISH	MODLE
	Jacky Chen	07/18/13		SLIDE SWICTH
	APPROVED BY:	DATE	SCALE	DWG NO.
	Tony Kao	07/18/13	1 : 1	SS-B35-B-S246
			SHEET NO.	PART NO.
			1 of 1	SS-B35-B-S246
				SIZE
				A4
				VER
				R



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM