

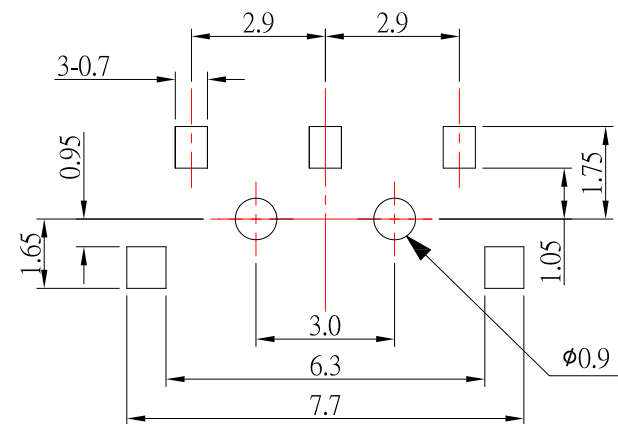

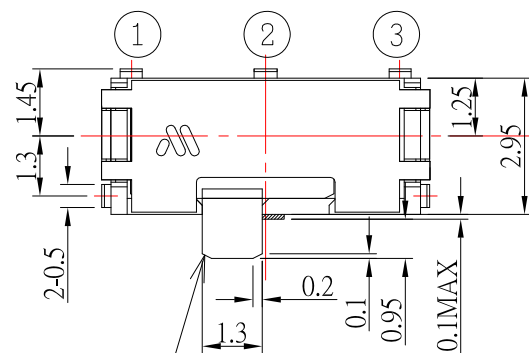





P.C.B LAND PATTERN

Knob position of shipment
Knob Color: Green

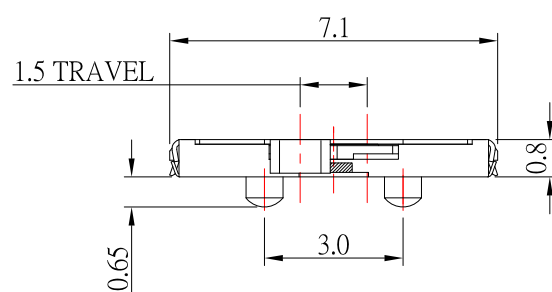

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 4V 0.3A
Circuit	1C-2P
Contact Resistance	1Ω Max.
Insulation Resistance	10MΩ min. (250VDC)
Dielectric Strength	100VAC/ 1minute.
Operating Force	0.5~3.5N
Operating Life (cycles)	10,000 cycles.



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
10/03/18
DATE
10/03/18
DATE
10/03/18

MAT'L		TITLE	SWITCH
FINISH		MODLE	SLIDE SWITCH
SCALE	1 : 1	DWG NO.	SS-B26-HF-S257
SHEET NO.	1 of 1	PART NO.	SS-B26-HF-S257

SIZE	A4
VER	R1