



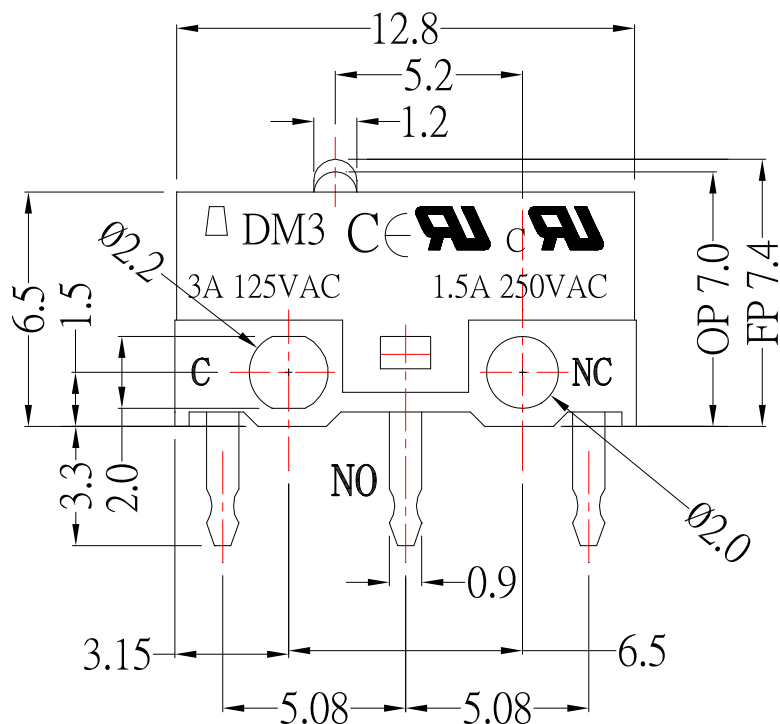

1. Functional spec.	
1.1 Rated Voltage	AC125V 3A / AC250V 1.5A
1.2 Contact Resistance	≤100mΩ
1.3 Operating Force	130 ± 30 gf
1.4 Free Position	7.35 ± 0.2 mm
1.5 Operating Position	7.0 ± 0.2 mm
2. Reliable Rating	
2.1 Mechanical Life	1000,000 CYCLES
2.2 Electrical Life	10,000 / 1,000,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC500V 1 minute
2.5 Soldering Temper	250°C Max 3 Sec.
2.6 Operating Temper	-25°C ~ +65°C
2.7 Ambient Humidity Used	<85%RH

SCHEMATIC



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH
Jack Lu	12/09/15	FINISH		MODLE	MICRO SWITCH
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	DM3-00P
Jacky Chen	12/09/15	SHEET NO.	1 of 1	PART NO.	DM3-00P
APPROVED BY:	DATE				
Tony Kao	12/09/15				

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新Rated Voltage	Jack	120915
2	圖面標示更新	Jack	031714
1	圖面更新	FrankWu	120211