




DIMENSIONS

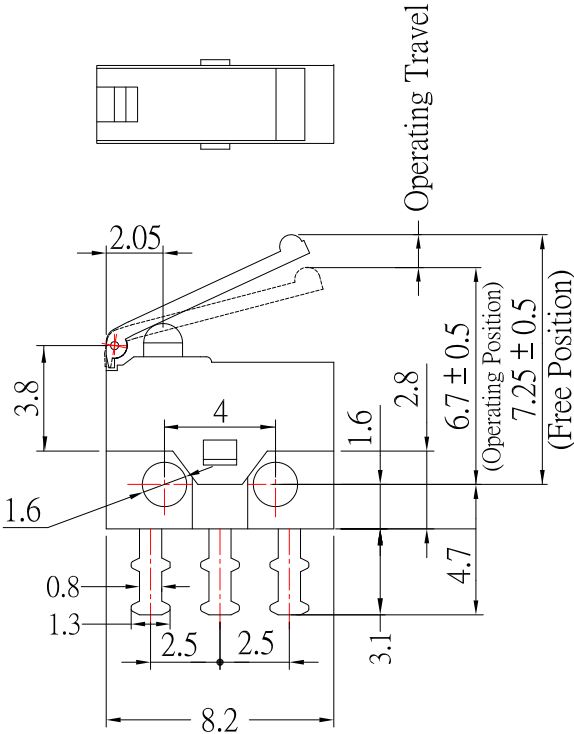

SCHEMATIC

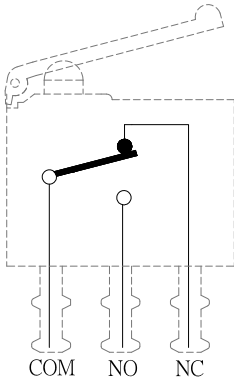

P.C.B LAYOUT MOUNTING



Specifications

1	Rating	30 VDC / 500mA
2	Operating Force	50 gf Max
3	Life	300,000 cycles Min
4	Operating Position	6.7mm ± 0.5mm
5	Contact Resistance	100 m ohms Max(Initial)
6	Insulation Resistance	100 M ohms Min(at 500VDC)
7	Dielectric withstanding voltage	250VAC 1 minute
8	Operating temperature	-25°C ~ +70°C
9	Ambient humidity	35% ~ 85% RH
10	Maifunction durability	10 to 55 Hz 1.5mm double amplitude during 2 hours

Material

1	Terminal	Brass , Silver Plated
2	Body	PBT
3	Cover	POM
4	Level	POM
5	Button	POM
6	Contact	BeCu



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Frank Wu
CHECKED BY:
Jacky Chen
APPROVED BY:
Tony Kao

DATE
04/17/12
DATE
04/17/12
DATE
04/17/12

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
MICRO SWITCH
SSM-001
SSM-001

SIZE
A4
VER
C

2	Drawing update	FrankWu	041712
1	1.Add P.C.B Layout 2. Update Spec · Material Table	FrankWu	020312
ITEM NO.	DESCRIPTION	DRAWN	DATE