





SCHEMATIC



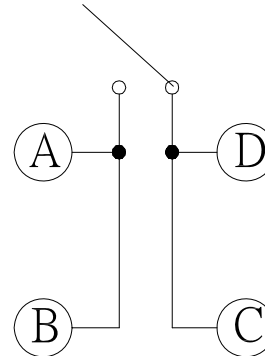


MOUNTING HOLES

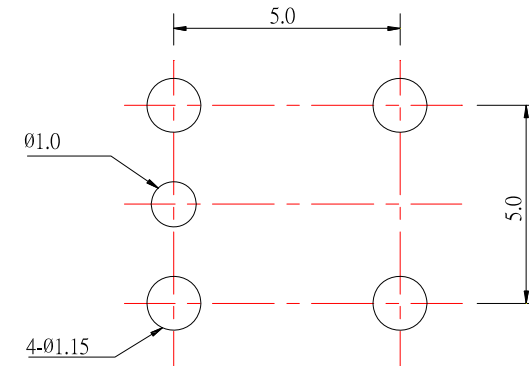

SPECIFICATION

1. RATING : DC12V 1.0mA ;
2. PRESSURE RESISTANCE STRENGTH : AC 100V 1 minute ;
3. CONTACT RESISTANCE : $\leq 100\text{m}\Omega$;
4. INSULATION RESISTANCE : $\geq 100\text{M}\Omega$, DC100V ;
5. SOLDER-ABILITY TEST : $255 \pm 5^\circ\text{C}$, $3 \pm 0.5\text{sec}$;
- 6 .TEMPERATURE APPLICATION : $-25^\circ\text{C} \sim +70^\circ\text{C}$;
7. HUMIDITY APPLICATION : $< 85\% \text{ RH}$;
8. OPERATING FORCE : $\leq 50 \text{ gf}$;
9. MECHANICAL LIFE : 100,000 CYCLES ;
10. ELECTRICAL LIFE : 100,000 CYCLES .

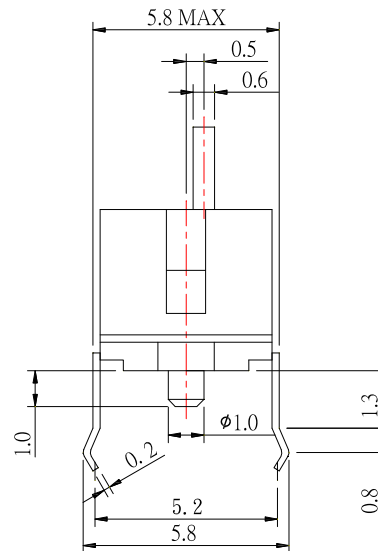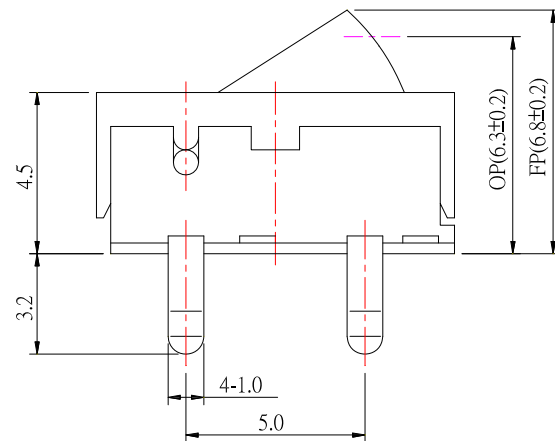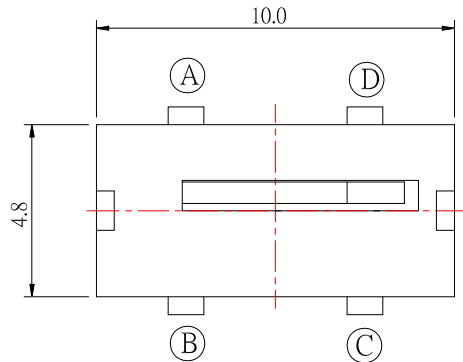

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH
Jack Lu	05/17/13	FINISH		MODLE	DETECTOR SWITCH
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	RM021-01A
Jacky Chen	05/17/13	SHEET NO.	1 of 1	PART NO.	RM021-01A
APPROVED BY:	DATE				
Tony Kao	05/17/13				

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新SPEC	Jack	051713
2	更新SPEC	Jack	010813
1	料號更新	FrankWu	122811