



CIRCUIT DIAGRAM



P.C.B LAYOUT

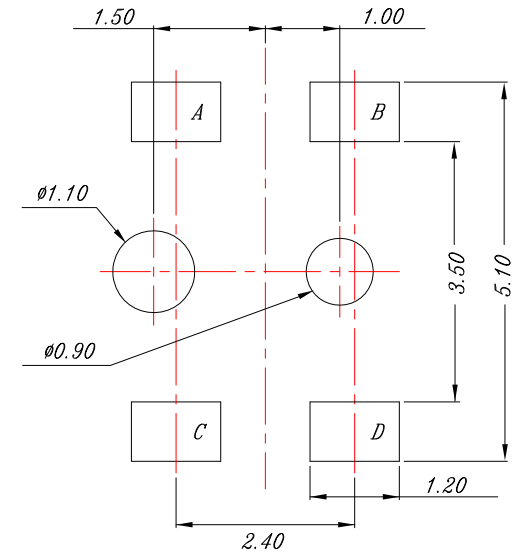

SPECIFICATIONS

<i>Rating</i>	<i>DC 5V ,1mA</i>
<i>Contact Resistance</i>	<i>1Ω Max.</i>
<i>Operating Force</i>	<i>40gf MAX</i>
<i>On Starting Position</i>	<i>3.5 ±0.2mm</i>
<i>Operating Life(cycles)</i>	<i>100,000</i>



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	±
Above 5 ~ 15	±
Above 15 ~ 30	±
: Above 30 ~ 50	±
Angle	±

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Frank Wu

DATE _____

10/27/1

	3.5 - 4.0
--	-----------

MATL

	 TRTÜ TRTÜ TRTÜ
--	---

TITLE

	QUESTIONS
--	------------------

SWITCH

CHECKED BY _____

DATE _____

FINISH

MODLE

DETECTO

Jacky Chen

10/27/1

[illegible][illegible]

APPROVED BY _____

DATE _____

SCALE

DWG N°	
--------	--

D.	DS-B80B1
----	----------

Tony Kao

10/27/1

SHEET N

PART N

D. DS-B80BI

SIZE

A4

VER
A