

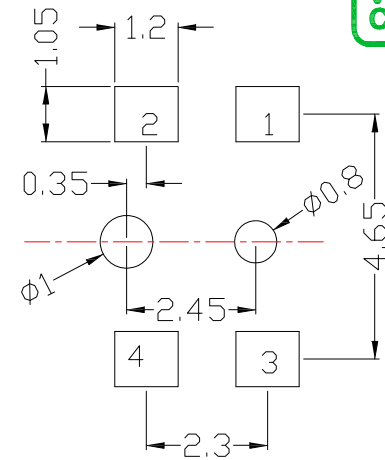
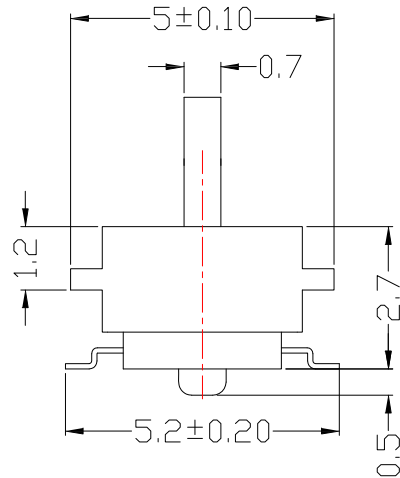
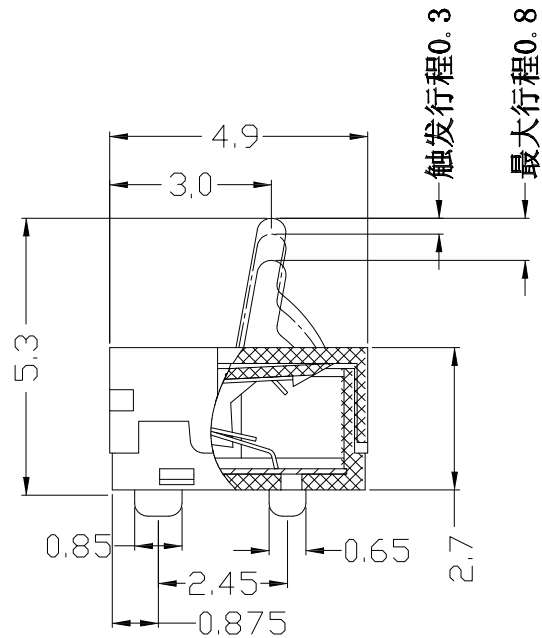




P.C.B LAYOUT

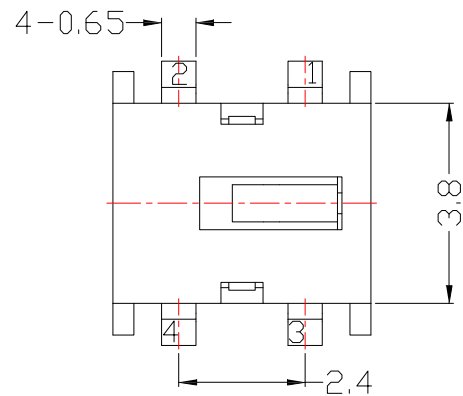

CIRCUIT DIAGRAM

### SPECIFICATIONS

|                       |               |
|-----------------------|---------------|
| Rating                | DC 12V, 0.1A. |
| Contact Resistance    | 100mΩ Max.    |
| Insulation Resistance | 100MΩ Min.    |
| Operating Force       | 40±10 gf      |
| Mechanical Life       | 20,000 cycles |

|    |          |                 |     |           |
|----|----------|-----------------|-----|-----------|
| 5  | TERMINAL | PHOSPHOR BRONZE | 1   | Ag PLATED |
| 4  | COVER    | NYLON           | 1   | BLACK     |
| 3  | SPRING   | BeCu            | 1   | Ag PLATED |
| 2  | KNOB     | NYLON           | 1   | BLACK     |
| 1  | CASE     | NYLON           | 1   | BLACK     |
| NO | NAME     | MATERIAL        | QTY | FINISHING |



东莞市高迪电子有限公司  
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao

DATE  
08/27/19  
DATE  
08/27/19  
DATE  
08/27/19

MATL  
FINISH  
SCALE  
SHEET NO.

TITLE  
MODLE  
DWG NO.  
PART NO.

SWITCH  
DETECTOR SWITCH  
DS-B80E-S379  
DS-B80E-S379

SIZE  
A4  
VER  
R1

|          |                   |       |        |
|----------|-------------------|-------|--------|
| 1        | 更新CIRCUIT DIAGRAM | Jack  | 082719 |
| ITEM NO. | DESCRIPTION       | DRAWN | DATE   |