

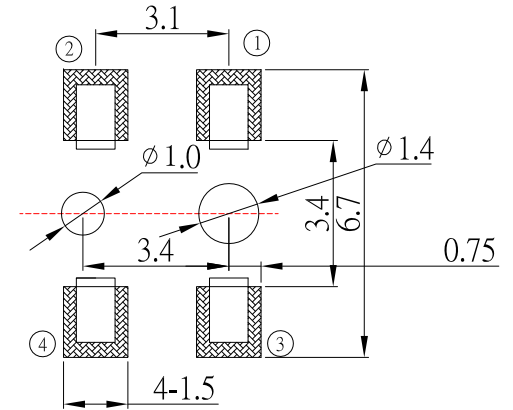
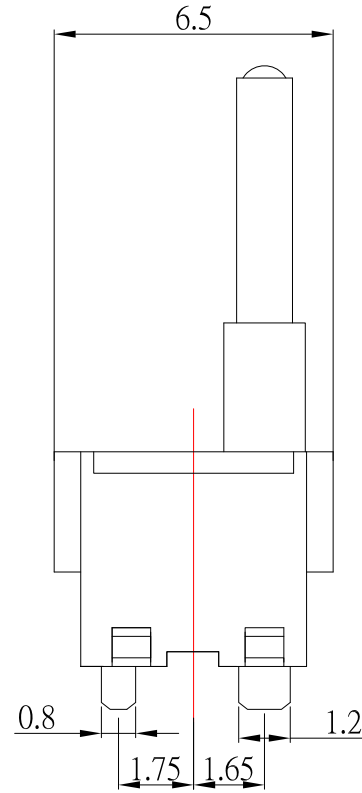
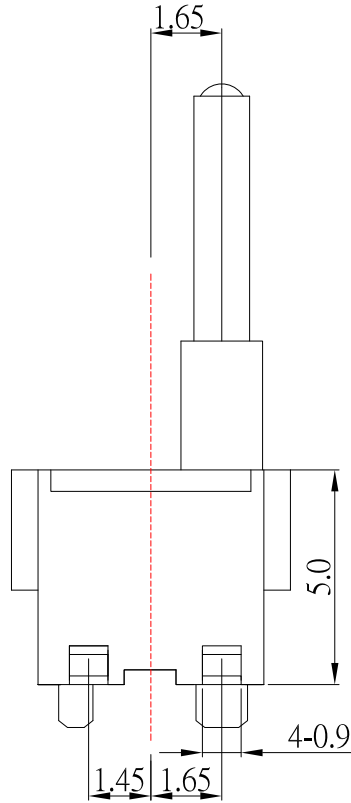


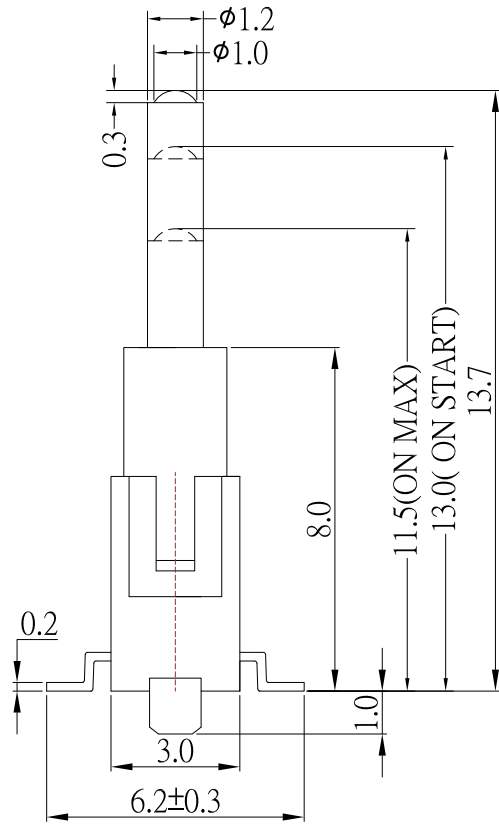

P.C.B LAYOUT



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	45±15 gf Max
Life	50,000 cycles

8	新增PIN編號位置	Jack	070319
7	更新SPEC	Jack	091714
6	更新(ON START)為13.0	Jack	090114
5	更新材質	Jack	081314
4	更新SPEC	Jack	021814
3	新增導通行程尺寸	Jack	012214
2	更新圓柱直徑為1.2mm	Jack	121613
1	更新圓柱直徑為1.3mm	Jack	102113
ITEM NO.	DESCRIPTION	DRAWN	DATE

9	更新尺寸	Jack	010620
---	------	------	--------



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

E	THERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA6T	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISH
DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	01/06/20	FINISH	MODLE	DETECTOR SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	01/06/20	1 : 1	DS-A30L2-S246	A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	01/06/20	1 of 1	DS-A30L2-S246	R9