

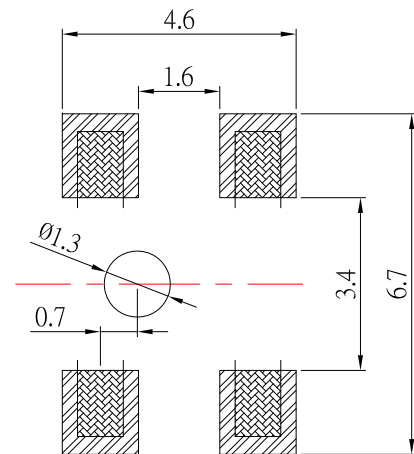
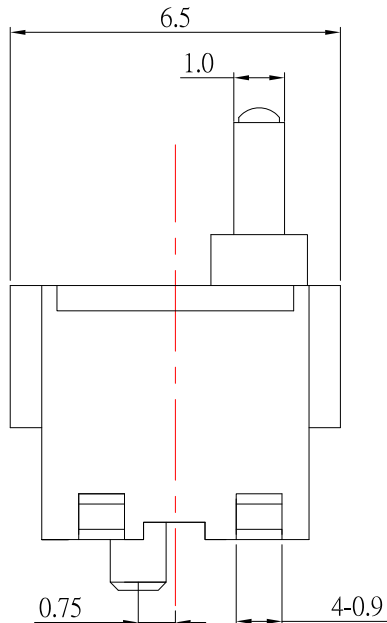
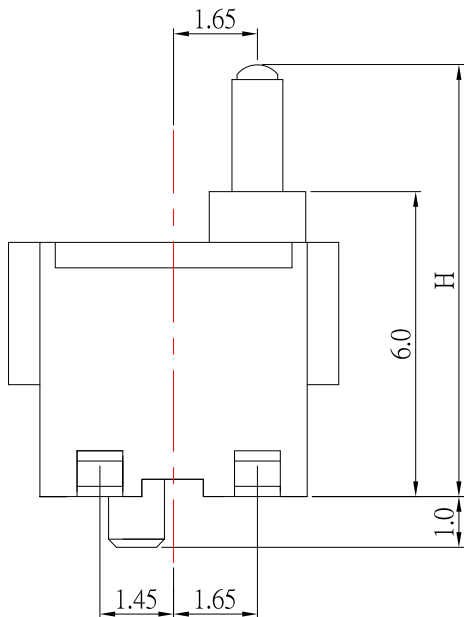


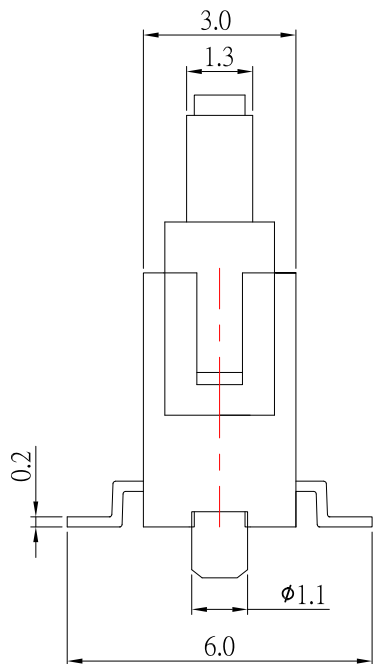

P.C.B LAYOUT

MODEL	H (mm)
—	8.50
A	9.00
F	9.50
C	11.0



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

E	THERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISH



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

05/21/15

CHECKED BY:

Jacky Chen

DATE

05/21/15

APPROVED BY:

Tony Kao

DATE

05/21/15

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

DETECTOR SWITCH(小方柄)

DS-A20Sx-S246

DS-A20Sx-S246

SIZE

A4

VER

A2

2	更新MODLE	Jack	052115
1	新增高度选项	Jack	123114
ITEM NO.	DESCRIPTION	DRAWN	DATE