

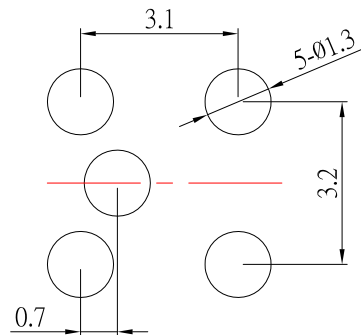
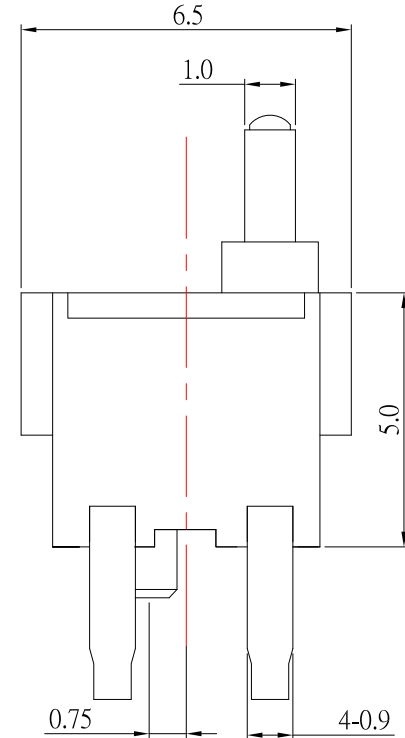
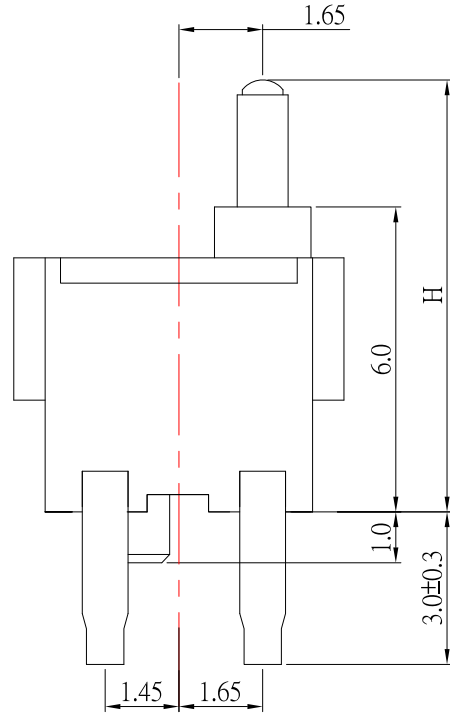


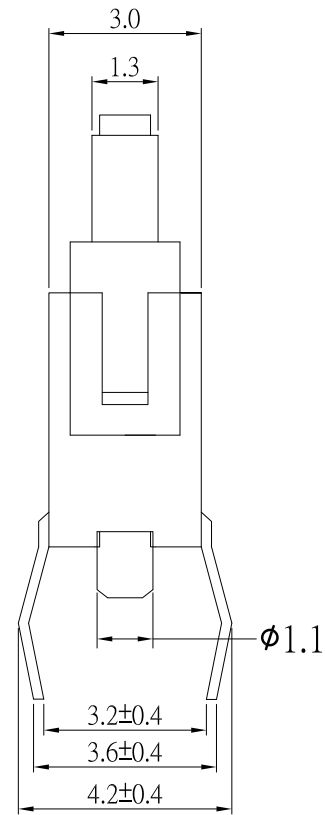

P.C.B LAYOUT

MODEL	H (mm)
—	8.50
A1	9.00
F	9.50
C	11.0



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

E	THERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISH



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	05/21/15	FINISH	MODLE	DETECTOR SWITCH(小方柄)
CHECKED BY:	DATE	SCALE	DWG NO.	DS-A20x-S246
Jacky Chen	05/21/15	1 : 1	PART NO.	DS-A20x-S246
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	05/21/15			

2	更新高度選項及MODLE	Jack	052115
1	新增高度選項"K"10.5mm	Jack	042115
ITEM NO.	DESCRIPTION	DRAWN	DATE