
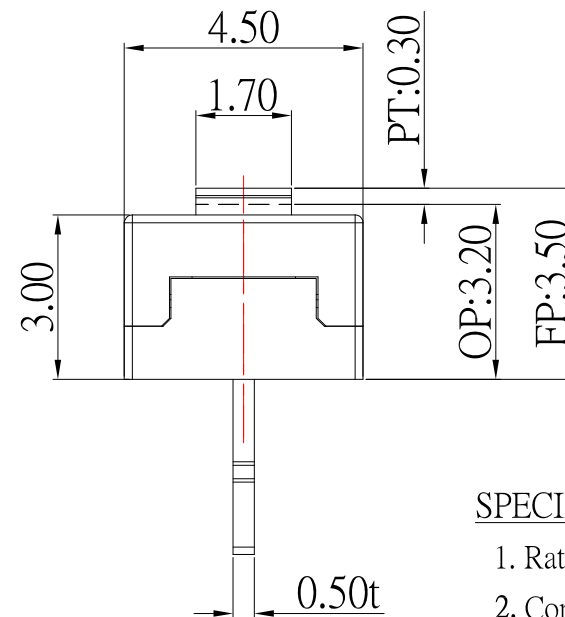
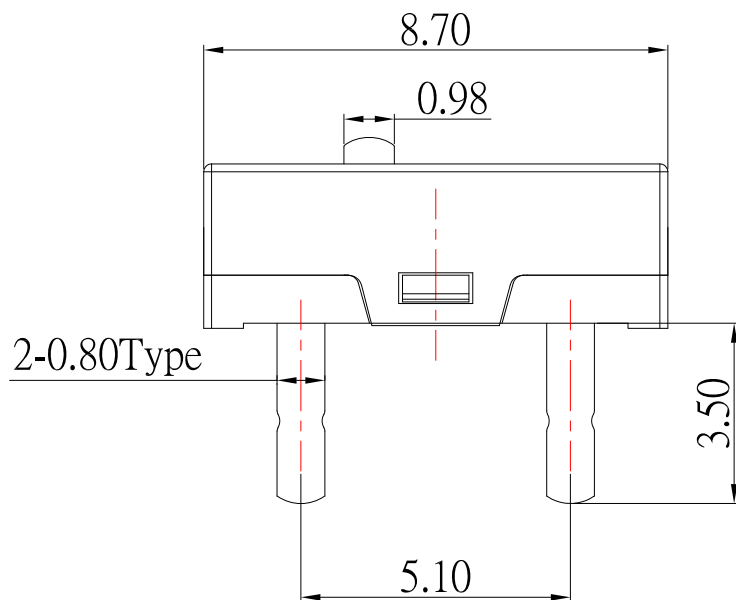


PCB LAYOUT



SCHEMATIC

SPECIFICATIONS

1. Rating : DC 12V 50mA
2. Contact Resistance : 200m Ω Max
3. Insulation Resistance : 100M Ω Min
4. Withstand Voltage : AC 250V for 1 minute
5. Operating Force : 65 $\pm$ 15gf
6. Operating Position : 3.20 $\pm$ 0.2 mm
7. Mechanical Life : 1,000,000 cycles Min

Contact	1	Silver	
Spring Plate	1	Phosphor Bronze	
Base	1	PA	Black
Terminal	3	BRASS	Plating Silver
Button	1	POM	White
Case	1	PC/PA	Black
PART NAME	QTY.	MATERIAL	REMARK



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 11/26/13

CHECKED BY: Jacky Chen
DATE: 11/26/13

APPROVED BY: Tony Kao
DATE: 11/26/13

MAT'L

FINISH

SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH

MODLE: MICRO SWITCH

DWG NO. DA-P2L-0P-S105

PART NO. DA-P2L-0P-S105

SIZE: A4
VER: R1

1	新增尺寸	Jack	112613
ITEM NO.	DESCRIPTION	DRAWN	DATE