



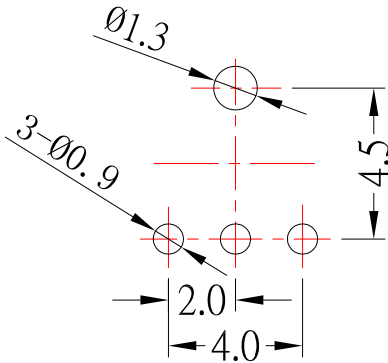


OPERATING MODE : SELF-LOCK : PS-D16H-S191
NON-LOCK : PS-D16HN-S191

SPECIFICATIONS

Rating	12V DC / 0.2A
Circuit	1P-2T
Contact Resistance	200 mΩ MAX .
Timing	NON-SHORTING
Stroke	Full:1.9mm , Lock:1.1mm
Operating Force	200 ± 50gf
Operating Life	10,000 CYCLES

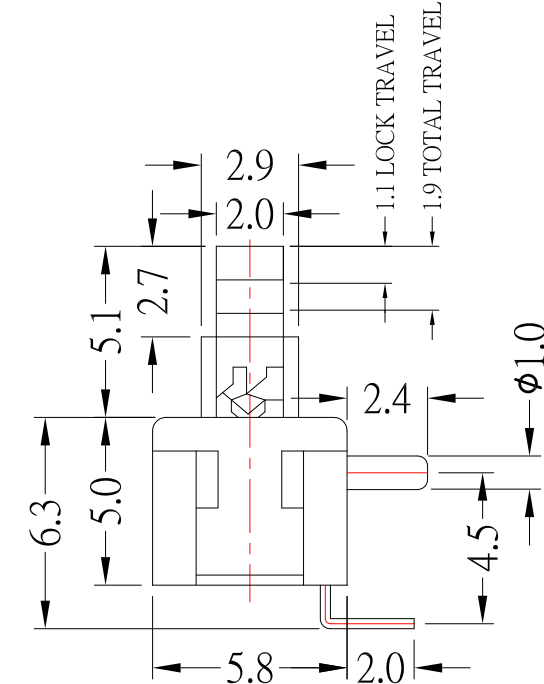

P.C.B LAYOUT
BOTTOM VIEW

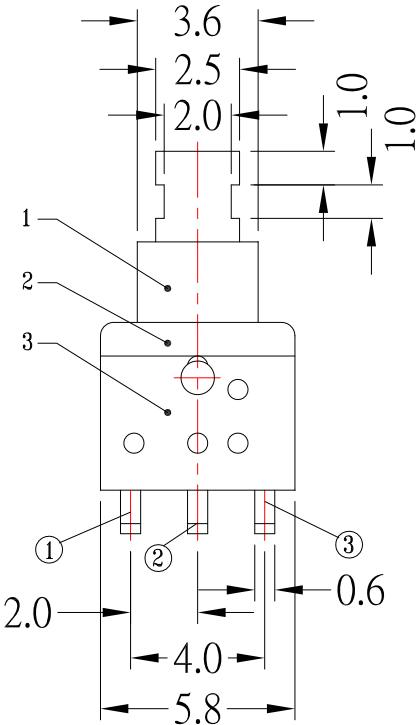

SCHEMATIC (NON-SHORTING)

7	CONTACT	PHOSPHOR BRONZE	1	Ag PLATED
6	TERMINAL	BRASS	3	Ag PLATED
5	SPRING	SUS	1	NATURAL
4	CAM STICK	SUS	1	NATURAL
3	CASE	PA66	1	GREY
2	COVER	POM	1	BLACK
1	KNOB	POM	1	WHITE
NO.	PARTS	MATERIALS	Q'TY	FINISH

		DRAWN BY: Jack Lu		DATE: 11/18/15		MAT'L		TITLE		SWITCH	
		CHECKED BY: Jacky Chen		DATE: 11/18/15		FINISH		MODLE		PUSH SWITCH	
		APPROVED BY: Tony Kao		DATE: 11/18/15		SCALE		DWG NO.		PS-D16Hx-S191	
						SHEET NO.		PART NO.		PS-D16Hx-S191	
TOLERANCE UNLESS OTHERWISE STATED :		Up to 5	±0.2	3RD. ANGEL'S	UNITS	MM					SIZE
		Above 5 ~ 15	±0.3								A4
		Above 15 ~ 30	±0.4								VER
		Above 30 ~ 50	±0.5								R3
Angle			±0.3°								