




DIMENSIONS

NOTE:

1. PS-D15L-S191: SELF- LOCK ;
2. PS-D15NL-S191:NON-LOCK

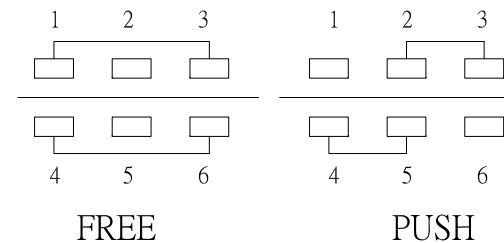

SCHEMATIC

SPECIFICATIONS

- 1.Rating : DC 30V 0.2A
- 2.Circuit : 2P2T
- 3.Timing : Non-Shorting
- 4.Operating force : 180 ± 50 gf
- 5.Life test : 10,000 cycles

P.C.B MOUNTING PATTERN

7	TERMINAL	6	BRASS	Ag-Plated
6	CONTACT	1	PHOSPHOR BRONZE	Ag-Plated
5	SPRING	1	SUS	NATURAL
4	CAM STICK	1	SUS WIRE	NATURAL
3	CASE	1	PBT	BLACK
2	COVER	1	POM	WHITE
1	KNOB	1	POM	BLUE
NO.	DESCRIPTION	QTY	MATERIAL	REMARK
DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	10/23/15	FINISH	MODLE	PUSH SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	PS-D15x-S191
Jacky Chen	10/23/15	1 : 1	PART NO.	PS-D15x-S191
APPROVED BY:	DATE	SHEET NO.	1 of 1	SIZE
Tony Kao	10/23/15	VER	A3	



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM