

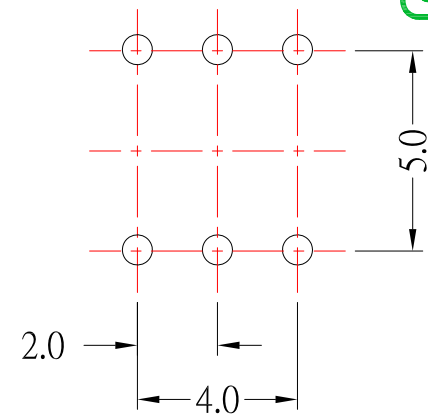
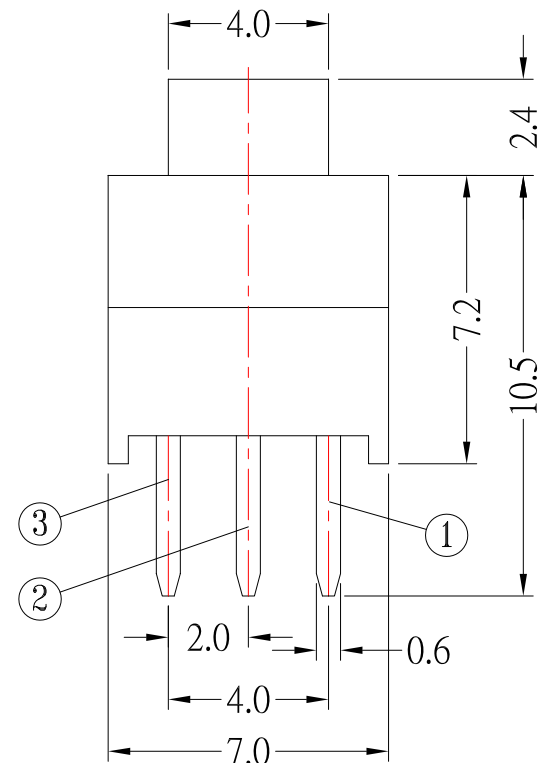


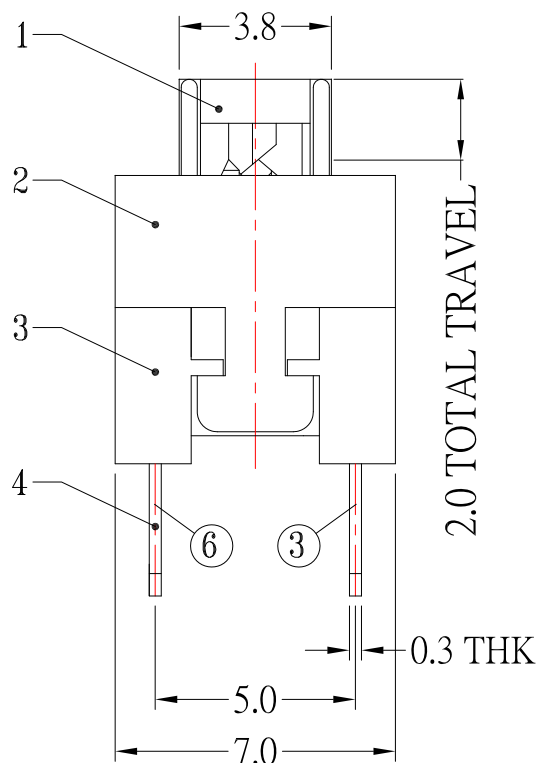

P.C.B MOUNTING PATTERN
BOTTOM VIEW

SPECIFICATIONS

- 1.Rating : DC 30V 0.1A
- 2.Circuit : 2P2T
- 3.Timing : Non-Shorting
- 4.Operating force : 200 ± 100gf
- 5.Life test : 10,000 cycles
- 6.Operating Mode : Non-Lock

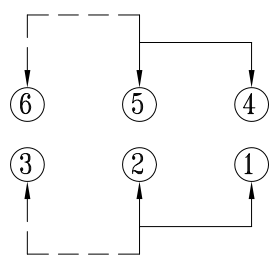

SCHEMATIC

6	CONTACT CLIP	2	PHOSPHOR BRONZE	Ag-Plated
5	SPRING	1	SUS	NATURAL
4	TERMINAL	6	BRASS	Ag-Plated
3	CASE	1	PBT	BLACK
2	COVER	1	POM	WHITE
1	KNOB	1	POM	BLUE
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ± 0.2	3RD. ANGEL'S	UNITS	MM
		Above 5 ~ 15 ± 0.3			
		Above 15 ~ 30 ± 0.4			
		Above 30 ~ 50 ± 0.5			
		Angle ± 0.3°			

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH	
Jack Lu	10/23/15					
CHECKED BY:	DATE	FINISH		MODLE	PUSH SWITCH	
Jacky Chen	10/23/15	SCALE	1 : 1	DWG NO.	PS-D12FNL-S191	SIZE
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	PS-D12FNL-S191	A4
Tony Kao	10/23/15					VER
						R2

2	新增SPEC	Jack	102315
1	更新圖面	Jack	020315
ITEM NO.	DESCRIPTION	DRAWN	DATE