





DIMNSIONS

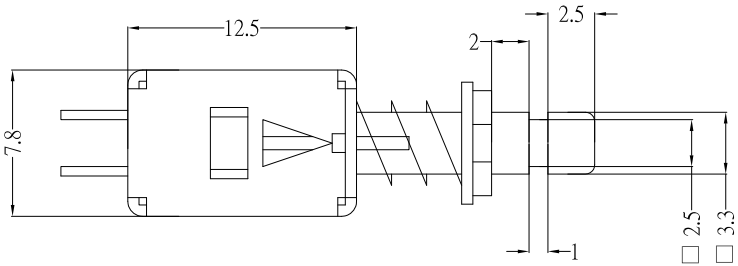


P.C.B MOUNTING PATTERN

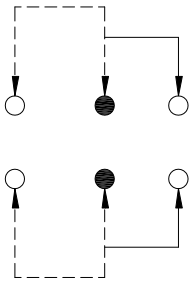

SCHEMATIC

3.5 TRAVEL(2.5LOCK)

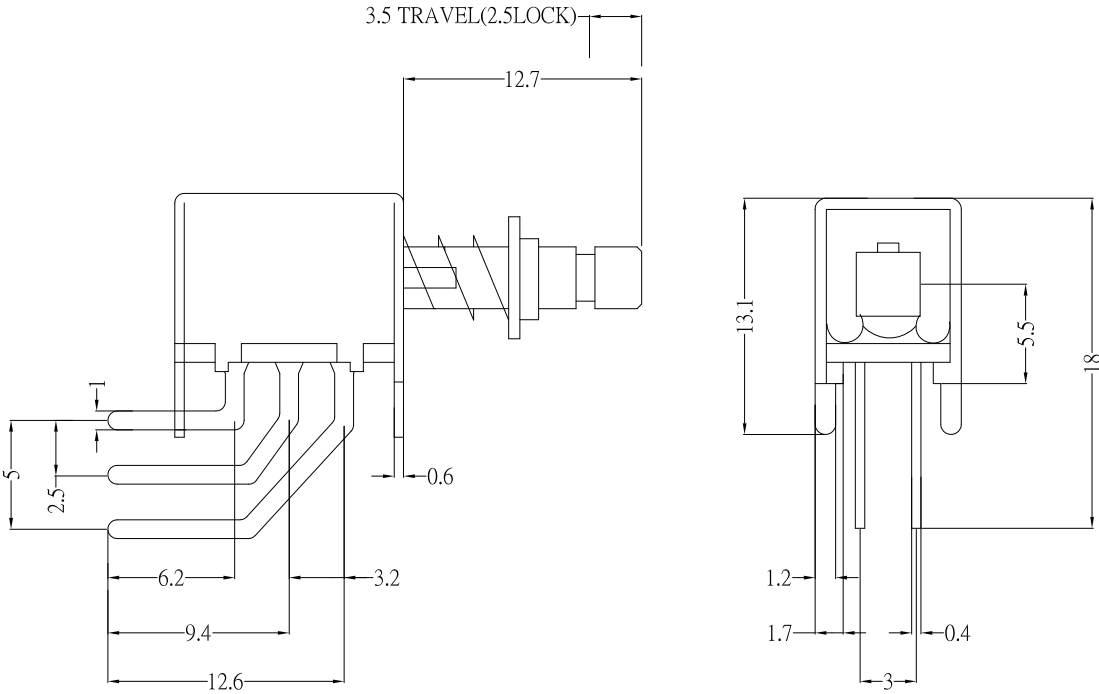

SPECIFICATIONS

Rating	DC50V 0.3A
Contact Resistance	70 mΩ Max
Circuit	2P2T
Timing	Non-Shorting
Operating force	350 ± 100gf
Life test	10,000 cycles

9	CONTACT CLIP	2	BRASS	Ag-Plated
8	SHRAPNEL	2	BRASS	
7	HOOK	2	BRASS	
6	BLOCK	1	STEEL	Ni-Plated
5	SPRING	1	STEEL	Ni-Plated
4	TERMINAL	6	BRASS	Ag-plated over Ni plated
3	BASE	1	PHENOLIC RESIN	Natural
2	FRAME	1	STEEL	Ni-Plated
1	NOB	1	POM	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED	Up to 5 ±0.2 Above 5 ~ 30 ±0.3 Above 30 ~ 50 ±0.4 Above 50 ±0.5 Angle ±0.3	3RD. ANGEL'S	UNITS	MM
-----------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	12/28/15			
CHECKED BY:	DATE	FINISH	MODLE	PUSH SWITCH
Jacky Chen	12/28/15			
APPROVED BY:	DATE	SCALE	DWG NO.	PS-22F35L-S191
Tony Kao	12/28/15	1 : 1		
		SHEET NO.	PART NO.	PS-22F35L-S191

1	新增SPEC	Jack	122815
ITEM NO.	DESCRIPTION	DRAWN	DATE