
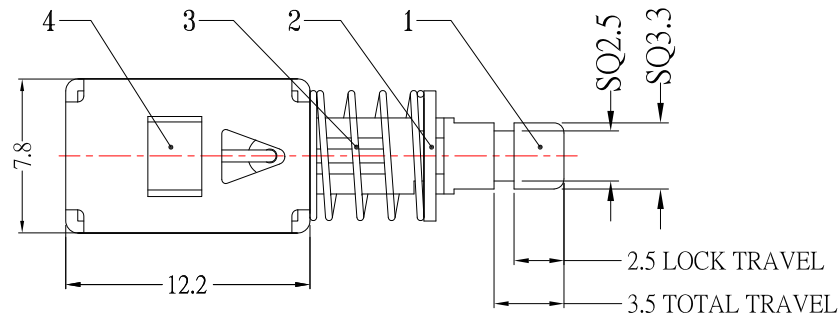




SCHEMATIC

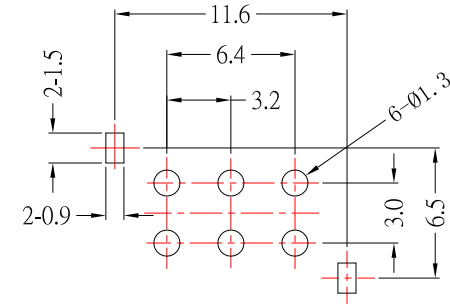

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Rating	DC 30V 1.0A
Contact Resistance	200 m Ω Max
Circuit	2P2T
Timing	No-Shorting
Operating force	350 $\pm$ 100gf
Life test	10,000 cycles
Operating Mode	Self-Lock

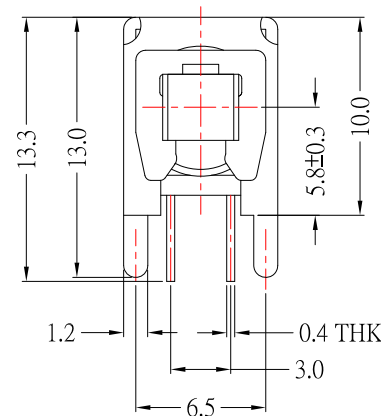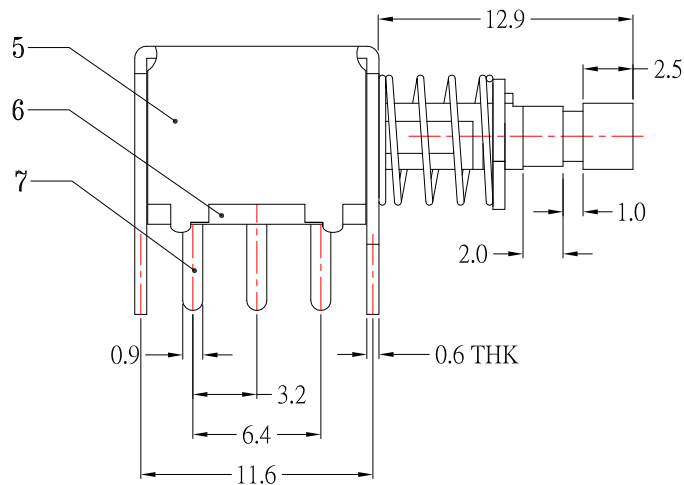

6	更新Rating	Jack	090717
5	更新尺寸	Jack	040617
4	更新圖面	Jack	033015
3	更新Contact Resistance	Jack	010615
2	新增Operating Mode	Jack	072514
1	新增尺寸及SPEC	Jack	010313
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle $\pm 0.3^\circ$	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE
Jack Lu	09/07/17
CHECKED BY:	DATE
Jacky Chen	09/07/17
APPROVED BY:	DATE
Tony Kao	09/07/17

9	Contact Clip	2	PBS	Ag-Plating
8	Cam Stick	1	PBS	Natural
7	Terminal	6	Brass	Ag-Plating
6	Base	1	Phenolic Resin	Natural
5	Frame	1	Stainless Steel	Ni-Plating
4	Spring Plate	1	PBS	Natural
3	Spring	1	Stainless Steel	Ni-Plating
2	Block	1	Stainless Steel	Ni-Plating
1	Knob	1	PA66	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
MAT'L		TITLE	SWITCH	
FINISH		MODLE	PUSH SWITCH	
SCALE	1 : 1	DWG NO.	PS-22F02L-S191	SIZE A4
SHEET NO.	1 of 1	PART NO.	PS-22F02L-S191	VER R6