
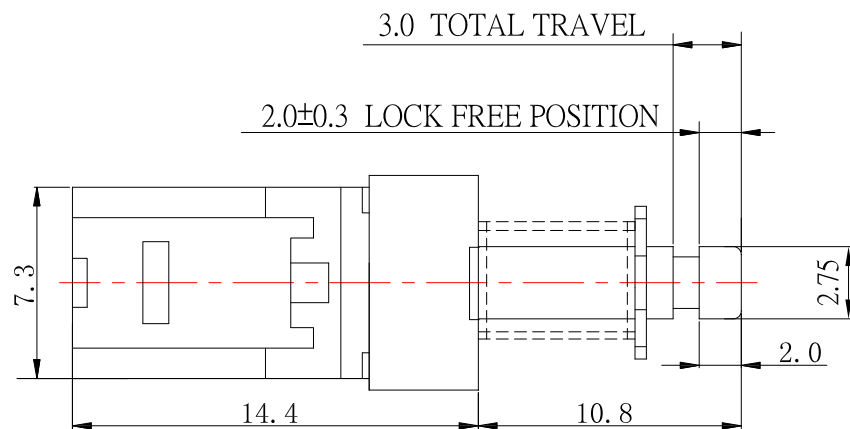




SCHEMATIC

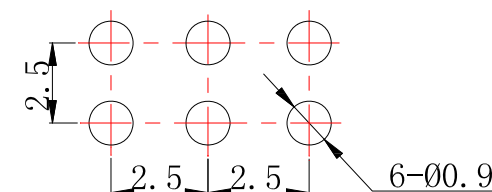

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Rating	DC 30V 0.1A
Contact Resistance	50 mΩ Max
Circuit	2P2T
Operation Force	230±50gf
Life test	10,000 cycles
Operating Mode	Self-Lock

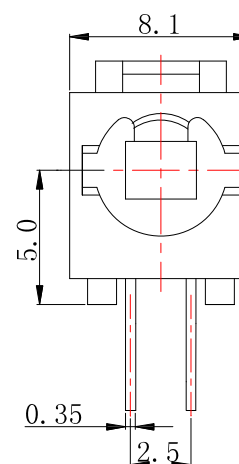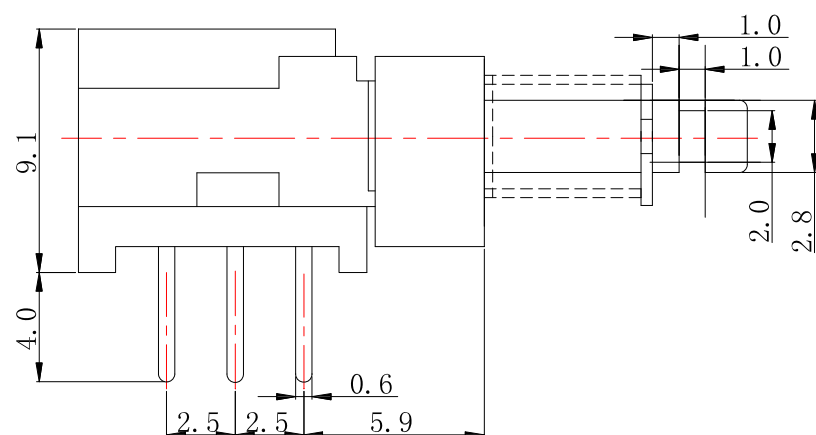

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 03/16/16

CHECKED BY: Jacky Chen
DATE: 03/16/16

APPROVED BY: Tony Kao
DATE: 03/16/16

10	Clip	2	PBS	
9	Base	1	Nylon	
8	Terminal	6	Brass	Ag-Plating
7	Stem	1	Nylon	
6	Ring	1	SPCC	
5	Spring	1	SUS	
4	Sleeve	1	Nylon	
3	Fixed Rod	1	SUS	
2	Spring Plate	1	SUS	
1	Case	1	Nylon	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
	MAT'L		TITLE	SWITCH
	FINISH		MODLE	PUSH SWITCH
	SCALE	1 : 1	DWG NO.	PS-22D01-S011
	SHEET NO.	1 of 1	PART NO.	PS-22D01-S011

SIZE
A4
VER
R2