


P.C.B LAYOUT MOUNTING PATTERN

SCHEMATIC (NON-SHORTING)

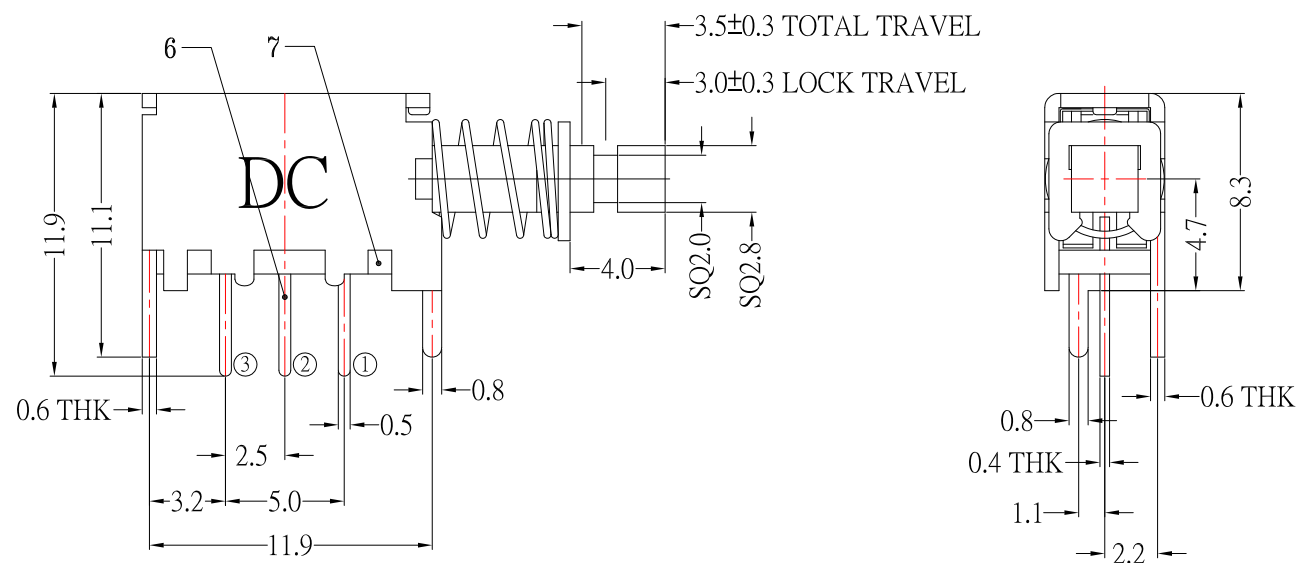

SPECIFICATIONS

- 1.Rating : DC50V 0.3A
- 2.Circuit : 1P2T
- 3.Timing : Non-Shorting
- 4.Operating force :  $250 \pm 100$ gf
- 5.Life test : 10,000 cycles
- 6.Operating Mode : Self-Lock

|     |              |     |                 |            |
|-----|--------------|-----|-----------------|------------|
| 9   | Contact Clip | 1   | Phosphor Bronze | Ag-Plating |
| 8   | Spring Plate | 1   | PBS             | Natural    |
| 7   | Base         | 1   | Phenolic Resin  | Natural    |
| 6   | Terminal     | 1   | Brass           | Ag-Plating |
| 5   | Knob         | 1   | PA66            | Blue       |
| 4   | Block        | 1   | Stainless Steel | Ni-Plating |
| 3   | Spring       | 1   | Steel Wire      | Ni-Plating |
| 2   | Cam Strick   | 1   | PBS Wire        | Natural    |
| 1   | Frame        | 1   | Spcc            | Ni-Plating |
| NO. | DESCRIPTION  | QTY | MATERIAL        | PLATING    |

|    |           |        |          |                    |            |
|----|-----------|--------|----------|--------------------|------------|
| 15 | MAT'L     |        | TITLE    | SWITCH             |            |
|    | FINISH    |        | MODLE    | PUSH SWITCH 藍柄 自鎖式 |            |
| 15 | SCALE     | 1 : 1  | DWG NO.  | PS-12E05-S191      | SIZE<br>A4 |
| 15 | SHEET NO. | 1 of 1 | PART NO. | PS-12E05-S191      | VER<br>R6  |



东莞市高迪电子有限公司  
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5  $\pm 0.2$   
Above 5 ~ 15  $\pm 0.3$   
Above 15 ~ 30  $\pm 0.4$   
Above 30 ~ 50  $\pm 0.5$   
Angle  $\pm 0.3^\circ$

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu  
CHECKED BY: Jacky Chen  
APPROVED BY: Tony Kao  
DATE: 06/30/15