

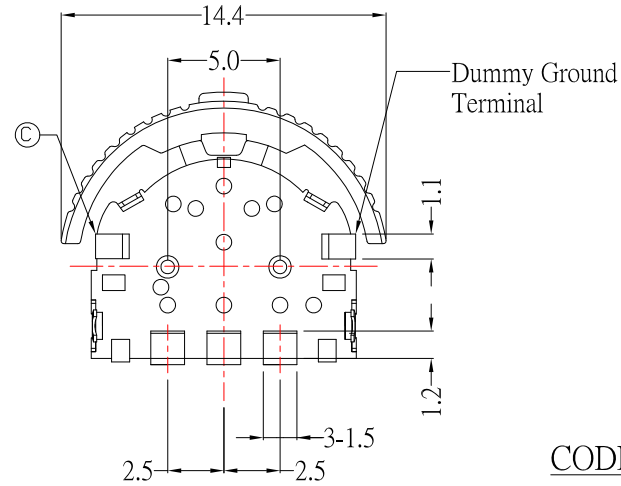
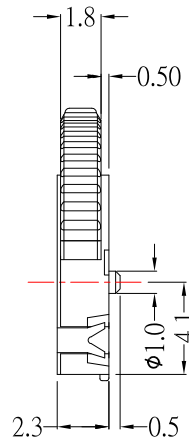


DIMENSIONS



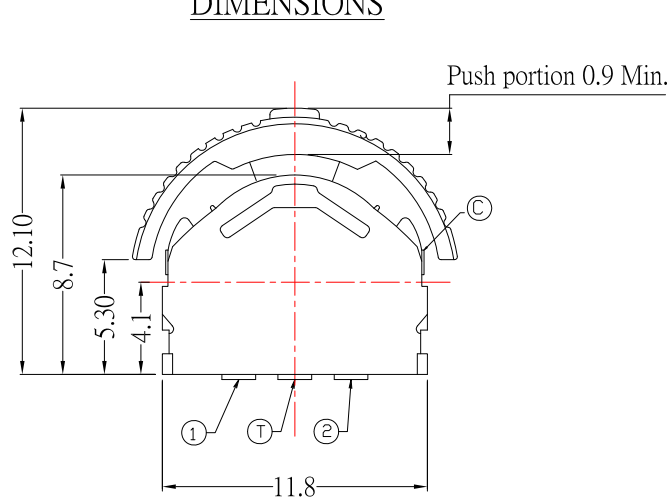


PRODUCT IMAGE

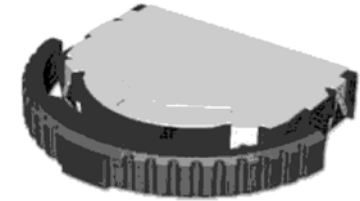



CODE TABLE

Code Table ( = ON)


Terminal	Angle				
	(20°)	(18°)	0°	(18°)	(25°)
①					
②					
C					

CCW ← → CW

P.C.B LAYOUT MOUNTING PATTERN

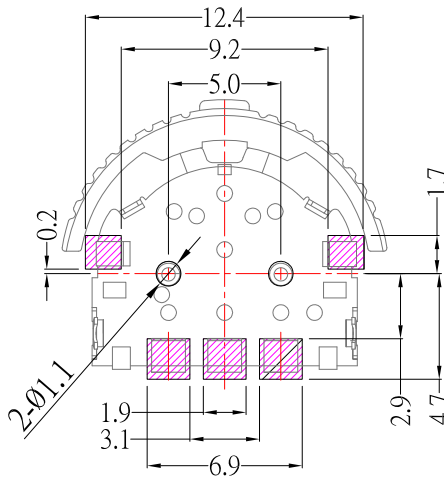

CIRCUIT DIAGRAM



SPECIFICATIONS

Rating	DC 5V 10mA
Output Voltage	1V Min, at 5V 1mA
Travel	Lever 70 ± 50 gf
Operating Force	Push 200 ± 100 gf
Operating Life (cycles)	100,000



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
06/22/15
DATE
06/22/15
DATE
06/22/15

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
LEVER SWITCH
K01B-S126
K01B-S126

SIZE
A4
VER
A0

1 of 1

100,000

100,000

100,000