

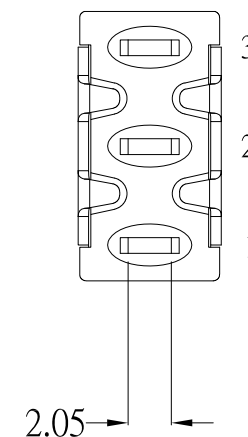
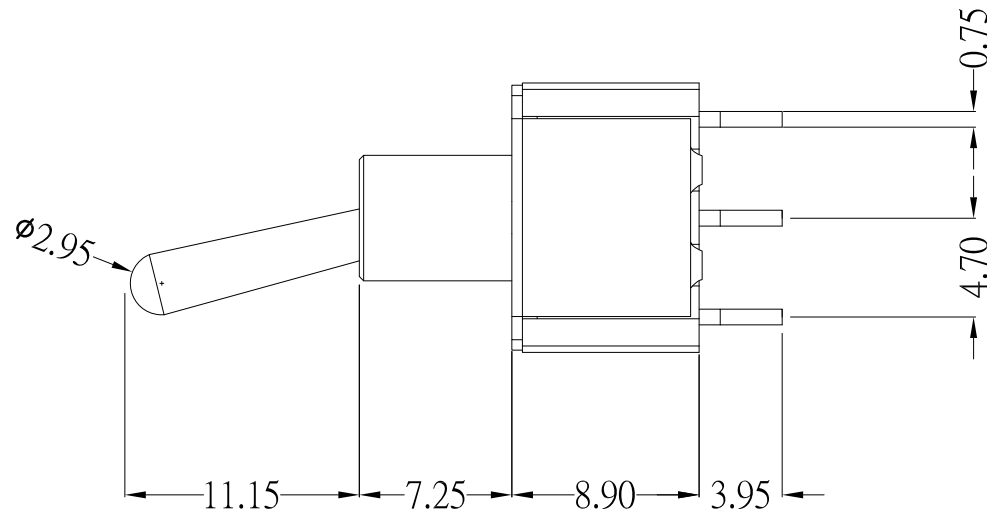



KEYWAY

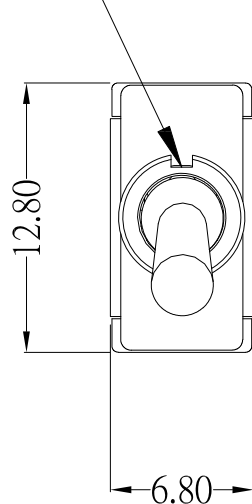

PRODUCT IMAGE

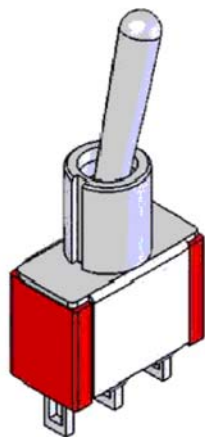

SCHEMATIC



SPECIFICATIONS:

CONTACT RATING : 5 AMPS / 120V AC or 28V DC

2 AMPS / 250V AC or 0.4VA AMPS @ 20V AC or DC

ELECTRICAL LIFE : 50,000 make-and-break cycles at full load.

CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 VDC

100 mA , for both coin silver and gold plated contacts.

INSULATION RESISTANCE : 1,000 MΩ min

DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.

OPERATING TEMPERATURE : -30°C to 130°C

MATERIALS:

CASE : Dially phthalate (DAP)(UL-94V-0)

ACTUATOR : Brass,chrome plated.

BUSHING : Brass. nickel plated.

HOUSING : Stainless steel.

TERMINAL/CONTACT : Brass , with silver or gold plated.
or gold over silver

SWITCH SUPPORT : Brass , tin plated.

Model No.	Switching Position		
T101	ON	NONE	ON
T102	ON	NONE	(ON)
T103	ON	OFF	ON
T104	(ON)	OFF	(ON)
T105	ON	OFF	(ON)
Term Comm.	2-3	OPEN	2-1



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°3RD.
ANGEL'S

UNITS

MM

DRAWN BY:

Frank Wu

DATE

01/03/12

MAT'L

TITLE

SWITCH

CHECKED BY:

Jacky Chen

DATE

01/03/12

FINISH

MODLE

TOGGLE ROCKER SWITCH

APPROVED BY:

Tony Kao

DATE

01/03/12

SCALE

1 : 1

DWG NO.

T10xT1B4A1

SIZE

A4

VER

B

ITEM NO.

DESCRIPTION

DRAWN

DATE

FrankWu

010312