

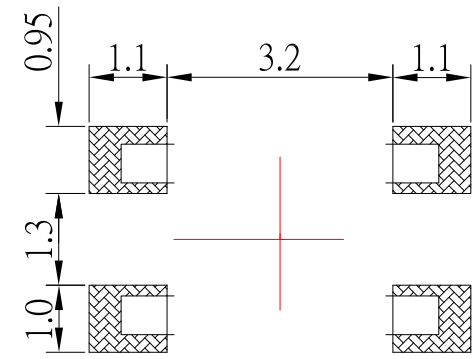
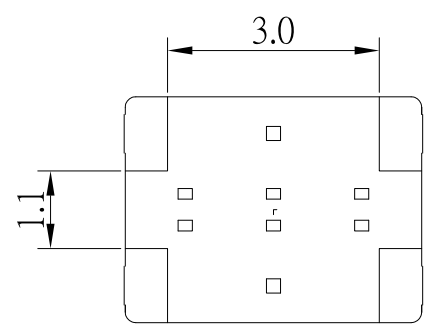
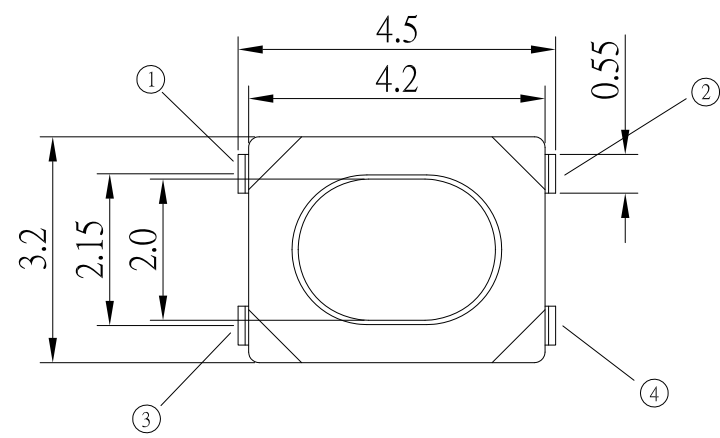




PCB LAYOUT

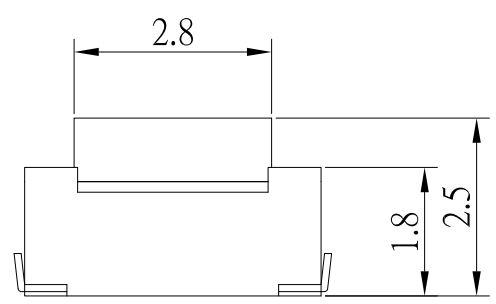

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 16V 50mA.			
Insulation Resistance	100 M Ω Min.			
Contact Resistance	100 m Ω Max.			
Travel	0.15 $\pm$ 0.1mm			
Operating Force	2	160 $\pm$ 50gf	3	260 $\pm$ 50gf
Operating Life (cycles)	100,000	50,000		

E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	SUS	
B	BASE	1	LCP	WHITE
A	STEM	1	PA6T	WHITE
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:		DATE	MAT'L	TITLE
Jack Lu		08/13/15		SWITCH
CHECKED BY:		DATE	FINISH	MODLE
Jacky Chen		08/13/15		TACT SWITCH 雙彈片
APPROVED BY:		DATE	SCALE	DWG NO.
Tony Kao		08/13/15	1 : 1	TS-A45-xS-S246
			SHEET NO.	PART NO.
			1 of 1	TS-A45-xS-S246
				SIZE
				A4
				VER
				R1



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 $\pm$ 0.2	3RD. ANGEL'S	UNITS	MM
		Above 5 ~ 15 $\pm$ 0.3			
		Above 15 ~ 30 $\pm$ 0.4			
		Above 30 ~ 50 $\pm$ 0.5			
		Angle $\pm$ 0.3°			

1	新增Operating Force:320gf及更新Travel	Jack	081315
ITEM NO.	DESCRIPTION	DRAWN	DATE