
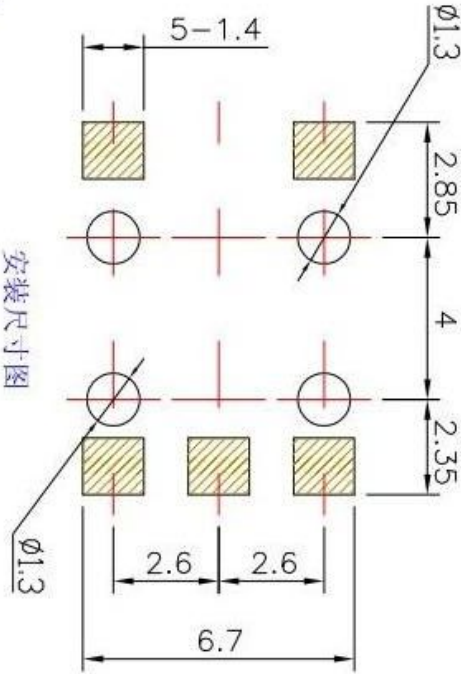
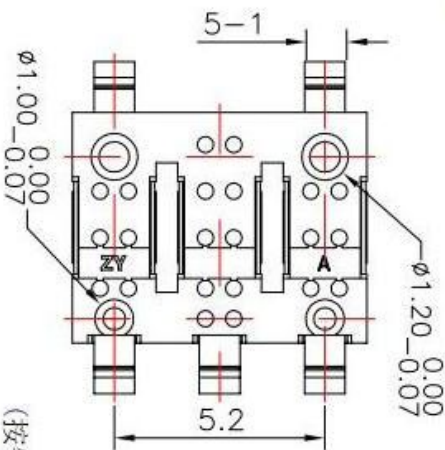
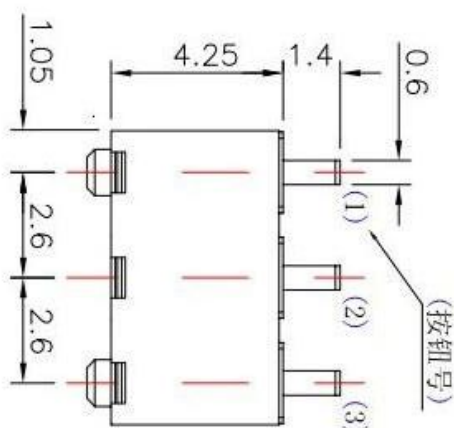


Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

E	THERMAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

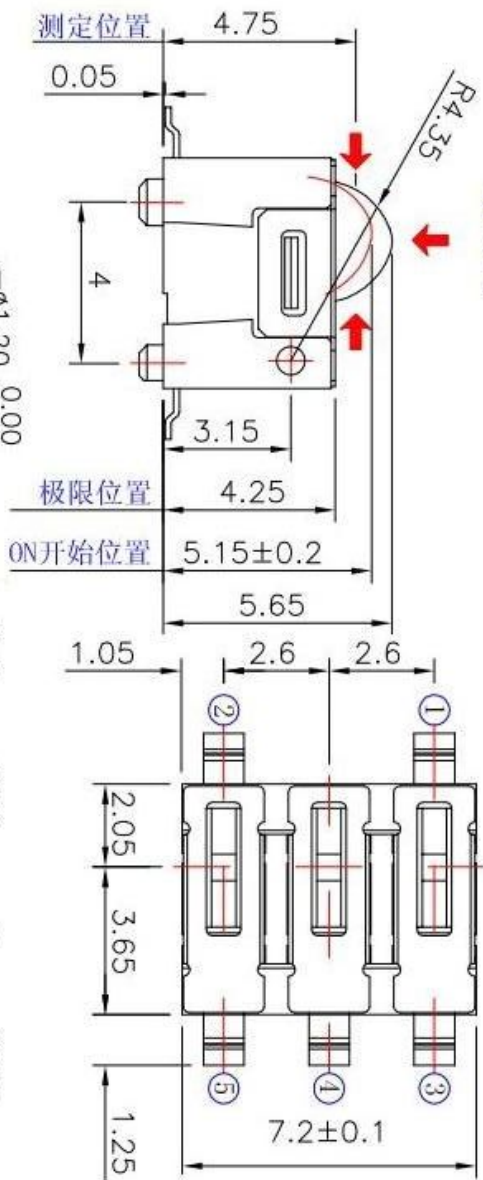

东莞市高迪电子有限公司
Dong Guan KDRC Electronic Switch Jack Co., Ltd.

DRAWN BY:	DATE
Jack Lu	05/21/15
CHECKED BY:	DATE

MAT'L	
FINISH	

TITLE	SWITCH
MODULE	DETECTOR SWITCH

--	--

2	更新高度選項及MOBILE	Jack	05/21/15
1	新增高度選項 W 10.50m	Jack	04/21/15

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5	± 0.2
Above 5 - 15	± 0.3
Above 15 - 30	± 0.4
Above 30 - 50	± 0.5
Angle	± 0.5

3RD.
ANGEL'S

UNIT 1

5	MINI
---	------

Jacky Chell	APPROVED BY:
	Tony Kao

05/21/15	DATE
----------	------

SCALE	
SHEET NO.	

1:1	
1 of 1	

DWG NO.	
PART NO.	

[illegible]

SIZE	
A4	
VER	
R2	