


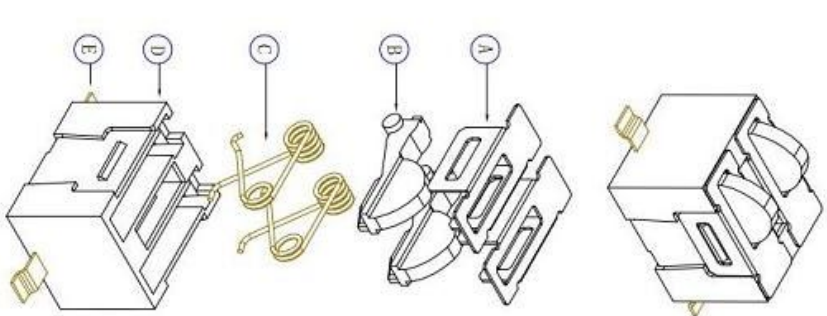

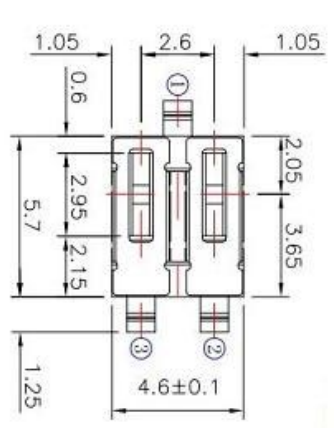
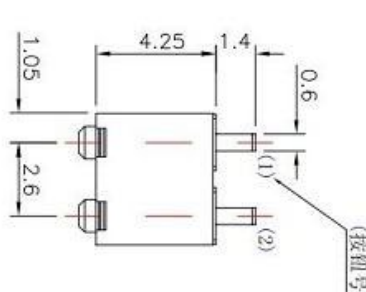


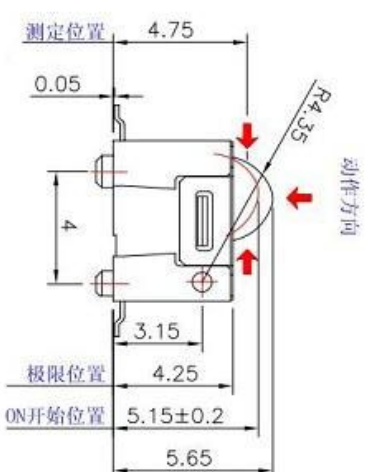

SPECIFICATIONS	
Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ± 1.5gf
Life	50,000 cycles

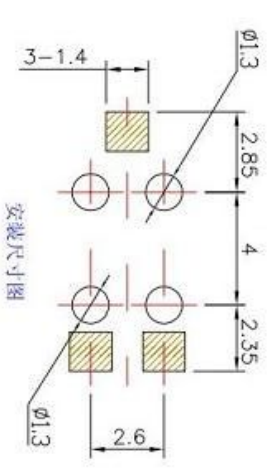

E	THERMINAL	PHOSPHOR BRONZE	4	AG PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	AG PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH
	PRE-ADN. REV.	DATE		

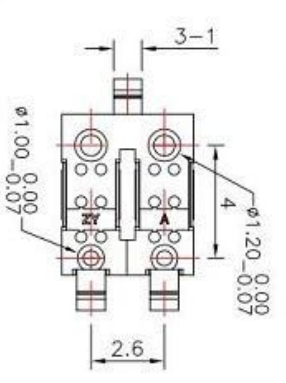

东莞市高迪电子有限公司
Dong Guan KUDR Electronic Switch Jack Co., Ltd

[illegible]

CHECKED BY: Jack Lu

DATE		05/21/15	
FINISH		MODEL	DETECTOR SWITCH
MATL		TITLE	SWITCH

TITLE	SWITCH
MODLE	DETECTOR SWITCH

--	--