

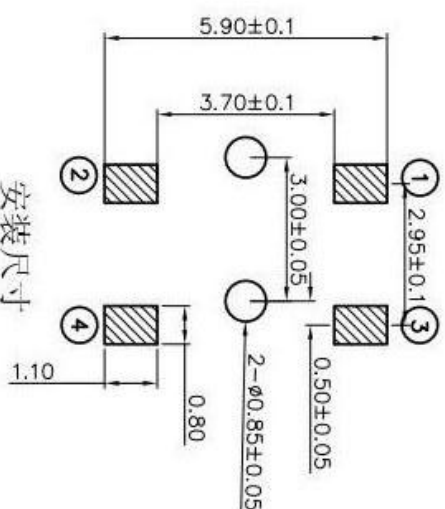
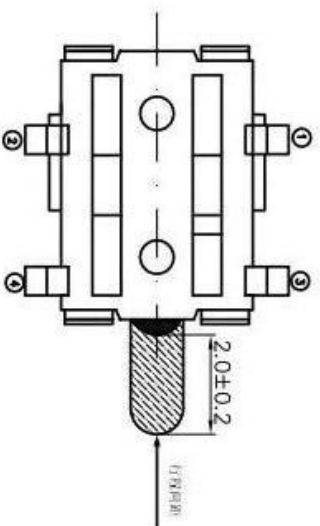
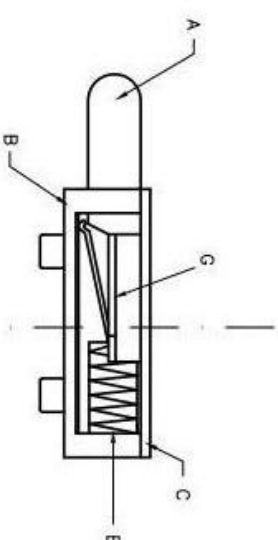
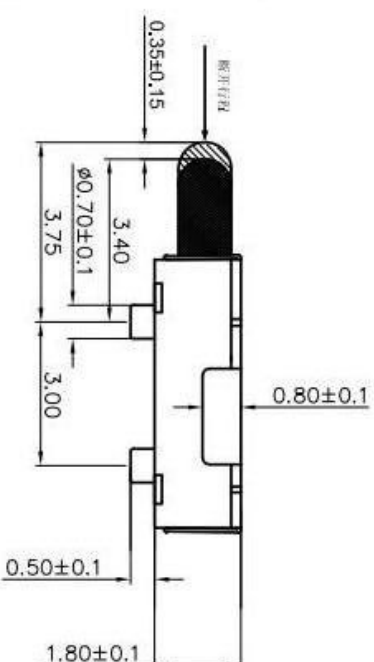


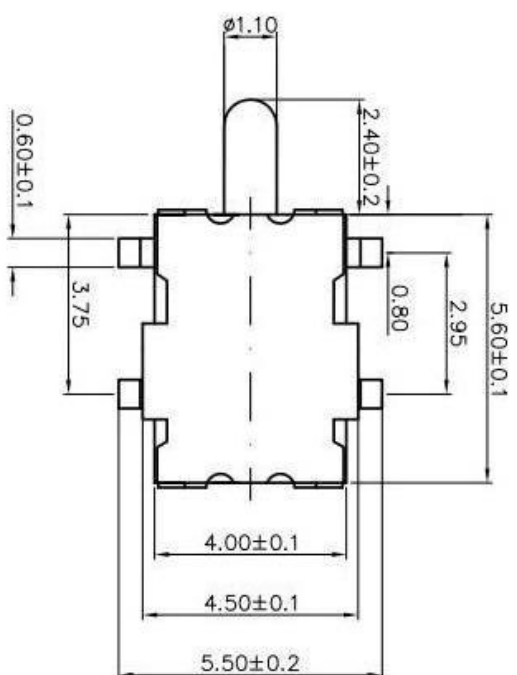

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

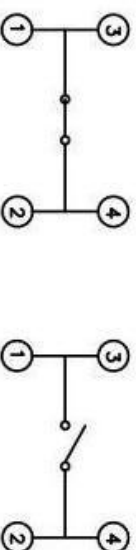

CIRCUIT DIAGRAM

NO.	PARTS	DATE	MAT'L	QTY	FINISH
E	TERMINAL		PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING		PHOSPHOR BRONZE	1	Ag PLATED
C	COVER		PA46	1	BLACK
B	CASE		PPA	1	BLACK
A	KNOB		PA46	1	BLACK



东莞市高迪电子有限公司
Dongguan KDR Electronic Switch Jack Co., Ltd.

1	规格书/规格书/规格书	Jack	05/11/5	TOLERANCE UNLESS OTHERWISE STATED: Above 5 - 15 ±0.3, Above 15 - 30 ±0.4, Above 30 - 50 ±0.5	3RD. ANGEL'S	UNITS	MM	APPROVED BY: Tony Kao	DATE: 05/21/15	SHEET NO. 1 of 1	PART NO.	SIZE A4	VER R2
2	规格书/规格书/规格书	Jack	05/11/5					Checked by: Jack Lu	DATE: 05/21/15				
3	规格书/规格书/规格书	Jack	05/11/5					Checked by: Jacky Chen	DATE: 05/21/15				
4	规格书/规格书/规格书	Jack	05/11/5					Checked by: Tony Kao	DATE: 05/21/15				