




SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±1.5gf
Life	50,000 cycles

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH

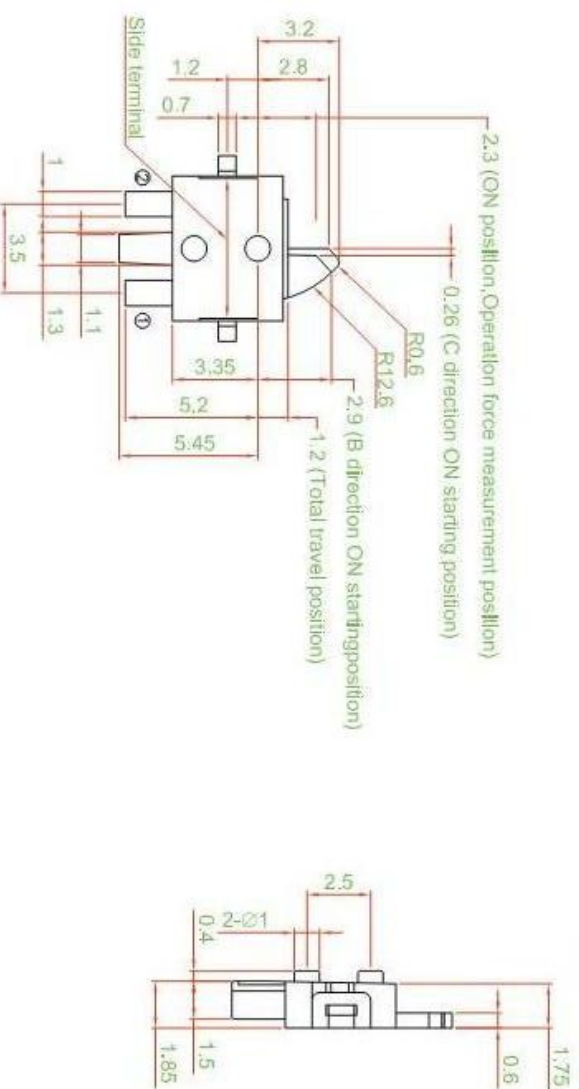

东莞市高迪电子有限公司
Dong Guan KDBR Electronic Switch Jack Co., Ltd.

2	规格书及模块MODULE	Jack	053115	3RD	UNIT	MM	DRAWN BY: Jack Lu	DATE: 05/21/15	MATL: FINISH	TITLE: SWITCH	SIZE: A4
1	规格书及模块MODULE	Jack	061115	ANGEL'S	UNIT	MM	CHECKED BY: Jacky Chen	DATE: 05/21/15	SCALE: 1:1	MODLE: DETECTOR SWITCH	VER: R2
7	规格书及模块MODULE	Jack	061115	ANGEL'S	UNIT	MM	APPROVED BY: Tony Kao	DATE: 05/21/15	SHEET NO. 1 of 1	PART NO.	

TOLERANCE UNLESS
OTHERWISE STATED: Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5