




SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	150mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±15gf
Life	50,000 cycles

NO.	PARTS	MATERIALS	QTY	FINISH
E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PPA	1	BLACK
A	KNOB	PA46	1	BLACK

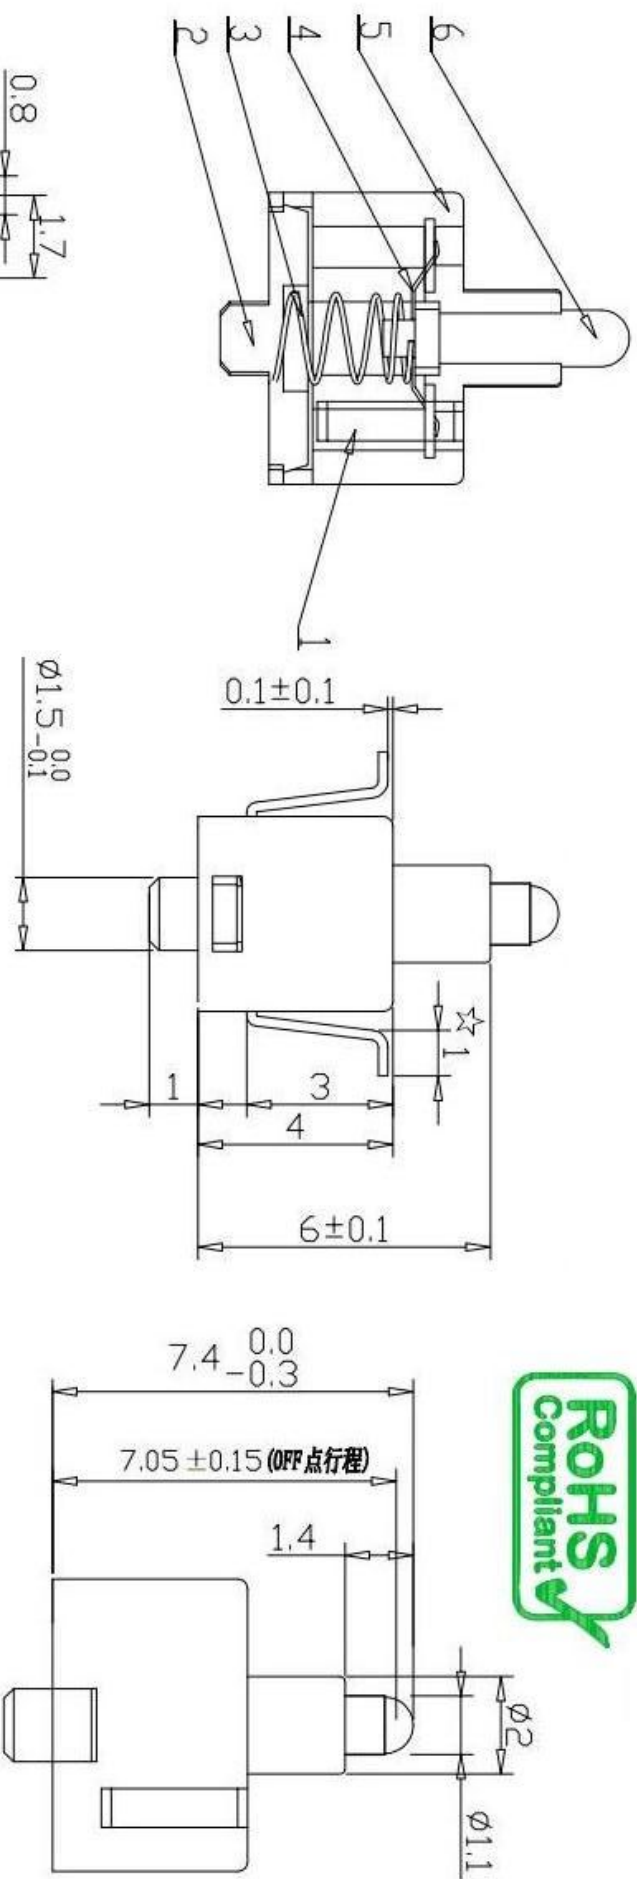

东莞市高迪电子有限公司
Dongguan KDR Electronic Switch Jack Co., Ltd.

ITEM NO.	DESCRIPTION	DRAWN	DATE	3RD. ANGELS	UNITS	MM	DRAWN BY:	DATE	MAT'L	TITLE	SWITCH	SIZE
1	规格书及模块图	Jack	05/11/15				Jacky Chen	05/21/15	FINISH	MODLE	DETECTOR SWITCH	A4
2	规格书及模块图	Jack	05/11/15				Jacky Chen	05/21/15	SCALE	DWG NO.		R2
3	规格书及模块图	Jack	05/11/15				Jacky Chen	05/21/15	SHEET NO.	1 of 1	PART NO.	
4	规格书及模块图	Jack	05/11/15				Jacky Chen	05/21/15				
5	规格书及模块图	Jack	05/11/15				Jacky Chen	05/21/15				
6	规格书及模块图	Jack	05/11/15				Jacky Chen	05/21/15				
7	规格书及模块图	Jack	05/11/15				Jacky Chen	05/21/15				

TOLERANCE UNLESS OTHERWISE STATED: Above 5 - 15 ±0.3
Above 15 - 30 ±0.4
Above 30 - 50 ±0.5
Angle ±0.3